



PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Patent Application

Inventor: Walker C. Morris

For: METHOD AND APPARATUS FOR TRANSMISSION OF DATA AND VOICE

Anticipated Classification of this application:

Class 379 Subclass 059.000

Prior Application:

Serial No. 08/711,515

Art Unit 2614

Filed: September 10, 1996

Examiner: V. Shankar

REQUEST FOR DIVISIONAL APPLICATION

ASSISTANT COMMISSIONER FOR PATENTS

WASHINGTON DC 20231

Sir:

This is a request for filing a divisional application under 37 C.F.R. § 1.60, of pending prior application serial no. 08/711,515 filed on September 10, 1996, of Walker C. Morris, for METHOD AND APPARATUS FOR TRANSMISSION OF VOICE AND DATA, which was divisional application of utility application Serial No. 08/314,533 filed September 28, 1994 which was a File Wrapper Continuation of utility application Serial No. 07/828,527 filed on January 28, 1992, now abandoned, which was a Continuation-in-Part of utility application Serial No. 07/733,826 filed July 22, 1991, now abandoned, which was a Continuation-in-Part of utility application Serial No. 07/429,356 filed October 31, 1989, now abandoned.

Enclosed is a complete copy of the prior application, including the declaration as originally filed. The application papers filed are a true copy of the prior application and no amendments referred to in the declaration filed to complete the prior application introduced new matter therein.

A verified statement to establish small entity status under 37 C.F.R. §§ 1.9 and 1.27 was filed in the prior application and such status is still proper and desired.

A check in the amount of \$644.00 to cover the filing fee and the additional claims and the additional independent claims added by the Preliminary Amendment is enclosed. I authorize the Commissioner to charge any additional fees that may be required, or to credit any overpayment to Deposit Account No. 20-1123. A duplicate copy of this sheet is enclosed. Prior to calculating the filing fee, please cancel original claims 45-64.

Please amend the accompanying 37 C.F.R. § 1.60 application by inserting before the first line, the sentence: --This is a division of pending prior application serial no. 08/711,515 filed on September 10, 1996, of Walker C. Morris, for METHOD AND APPARATUS FOR TRANSMISSION OF VOICE AND DATA, which was a division of serial no. 08/314,533 filed on September 28, 1994 which was a File Wrapper Continuation of utility application Serial No. 07/828,527 filed on January 28, 1992, now abandoned, which was a Continuation-in-Part of utility application Serial No. 07/733,826 filed July 22, 1991, now abandoned, which was a Continuation-in-Part of utility application Serial No. 07/429,356 filed October 31, 1989, now abandoned.--

Four (4) pages of formal drawing are enclosed.

A Preliminary Amendment is enclosed.

The power of attorney in the prior application is to W. Thomas Timmons, Reg. No. 27,839, and H. Dennis Kelly, Reg. No. 31,032. Please address all future correspondence to:

W. Thomas Timmons  
TIMMONS & KELLY  
The White House on Turtle Creek  
2401 Turtle Creek Blvd  
Dallas TX 75219-4760  
TEL (214) 528-1881  
FAX (214) 528-1882

All statements made of my own knowledge are true. All statements made on information and belief are believed to be true. I know that willful false statements and the like are punishable by fine or imprisonment, or both, under 18 U.S.C. § 1001. I also know that such willful statements may jeopardize the validity of the application or any patent issued on the application.

Respectfully submitted,




W. Thomas Timmons  
Registration No. 27,839  
TIMMONS & KELLY  
The White House on Turtle Creek  
2401 Turtle Creek Blvd  
Dallas TX 75219-4760  
TEL: (214) 528-1881  
FAX: (214) 528-1882

Attorneys for Applicant

Date: 31 August 1998



CERTIFICATE OF MAILING BY "EXPRESS MAIL"



"EXPRESS MAIL" MAILING LABEL NUMBER EF 528 137 197 US

DATE OF DEPOSIT 31 August 1998

I HEREBY CERTIFY THAT THE PATENT APPLICATION ENTITLED "METHOD AND APPARATUS FOR TRANSMISSION OF DATA AND VOICE," a divisional application of Serial No. 08/711,515 along with a Request for Divisional Application, a Preliminary Amendment and a check in the amount of \$644.00

ATTORNEY DOCKET NUMBER P-8078CIP2C

IS BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO ASSISTANT COMMISSIONER FOR PATENTS, BOX PATENT APPLICATION, WASHINGTON, D. C. 20231.

W. Thomas Timmons

(TYPED OR PRINTED NAME OF PERSON MAILING PAPER OR FEE)

W. Thomas Timmons

(SIGNATURE OF PERSON MAILING PAPER OR FEE)

09445137 083198



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the patent application of

Walker C. Morris

Inventor: Walker C. Morris

Serial No.:

Filing Date:

Divisional of:

Serial No. 08/711,515

Filing Date: September 10, 1996

and

Serial No.: 08/314,533

Filing Date: September 28, 1994

which is a File Wrapper Continuation of:

Serial No.: 07/828,527

Filing Date: January 28, 1992

Title: METHOD AND APPARATUS FOR TRANSMISSION OF VOICE AND DATA

Examiner: V. Shankar

Art Unit: 2614

**PRELIMINARY AMENDMENT**

The Honorable Commissioner  
of Patents and Trademarks  
Washington, D.C. 20231

Sir:

Please amend the above identified application as follows:

Please amend the title to read "METHOD AND APPARATUS FOR  
TRANSMISSION OF ANALOG AND DIGITAL"

Please amend the claims as follows:

Please add the following claims:

RECEIVED "ELECTRONIC" 09/03/96

- 09445437 003198  
867220 "CE54T60
- - 65. An apparatus for transmitting digital signals over a telephone landline or a wireless telephone system and for transmitting analog signals over the telephone landline or the wireless telephone system, comprising:
- a modem;
  - a telephone line interface;
  - a microcontroller;
  - a memory operatively connected to said microcontroller;
  - protocol software in said memory for controlling the operation of the apparatus;
  - a wireless telephone interface for operatively connecting to a wireless telephone;
  - means for providing analog communications for transmission over the telephone landline or the wireless telephone system;
  - a first analog switch operatively connecting a first terminal either to said means for providing analog communications or to said modem as decided by the microcontroller;
  - a second analog switch operatively connecting said telephone line interface and said wireless telephone interface or not as decided by the microcontroller; and
  - a third analog switch operatively connecting the first terminal of the first analog switch with said telephone line interface or not as decided by the microcontroller.
66. The apparatus of claim 65 wherein said protocol software includes means for retrying the connection phase for a total of six tries.
67. The apparatus of claim 66 wherein said protocol software includes means for retransmitting data packets, after successful connection phase, for a total of eighteen tries.
68. The apparatus of claim 67 wherein said protocol software includes means to suspend transmission to wait for the recovery of loss of carrier.
69. The apparatus of claim 68 wherein said protocol software includes means to switch

the mode of operation of said modem from synchronous to asynchronous if carrier loss occurs during transmission in the synchronous mode of operation and to switch back to the synchronous mode upon recovery of the carrier.

70. An apparatus for transmission digital signals over a telephone landline, a wireless radio frequency network or a wireless telephone system and for transmitting analog signals over the telephone landline, the wireless radio frequency network or a wireless telephone system, comprising:
- a modem;
  - a telephone line interface;
  - a microcontroller operatively connected to said modem;
  - a memory operatively connected to said microcontroller;
  - protocol software in said memory for controlling the operation of the apparatus;
  - a wireless telephone interface for operatively connecting to a wireless telephone;
  - a radio frequency interface for connecting to a radio frequency transceiver unit;
  - means for providing analog communication;
  - a first analog switch operatively connecting a first terminal either to said means for providing analog communications or to said modem as decided by the microcontroller;
  - a second analog switch operatively connecting said telephone line interface and said wireless telephone interface or not as decided by the microcontroller; and
  - a third analog switch operatively connecting the first terminal of the first analog switch with either said telephone line interface or said radio frequency interface as decided by the microcontroller.
71. The apparatus of claim 70 wherein said protocol software includes means for retrying the connection phase for a said number of tries.
72. The apparatus of claim 71 wherein said protocol software includes means for retransmitting data packets, after successful connection phase, for a said number of tries.

73. The apparatus of claim 72 wherein said protocol software includes means to suspend transmission to wait for the recovery of loss of carrier.
74. The apparatus of claim 73 wherein said protocol software includes means to switch the mode of operation of said modem from synchronous to asynchronous if carrier loss occurs during transmission in the synchronous mode of operation and to switch back to the synchronous mode upon recovery of the carrier.
75. An apparatus for transmission of digital signals over ordinary telephone line service or a wireless telephone system and for transmitting analog signals over the telephone line service, the radio frequency or the wireless telephone system, comprising:
- a modem;
  - a telephone line interface operatively connected to said modem;
  - a microcontroller operatively connected to said modem;
  - a memory operatively connected to said microcontroller;
  - protocol software in said memory for controlling the operation of the apparatus;
  - a wireless telephone interface for connecting to a wireless telephone unit;
  - radio frequency interface for connecting to radio frequency telemetry modules or packet radios;
  - means for providing analog communication;
  - a first analog switch operatively connecting a first terminal either to said means for providing analog communications or to said modem as decided by the microcontroller;
  - a second analog switch operatively connecting said telephone line interface and said wireless telephone interface or not as decided by the microcontroller;
  - a third analog switch operatively connecting the first terminal of the first analog switch either to said telephone line interface or to said radio frequency interface as decided by the microcontroller; and
  - a fourth analog switch operatively connecting a remote device to said telephone line interface or not as decided by the microcontroller.



76. The apparatus of claim 75 wherein said protocol software includes means for retrying the connection phase for a total of six tries over a wireless telephone system, radio frequency network or a telephone line service.
77. The apparatus of claim 76 wherein said protocol software includes means for retransmitting data packets, after successful connection phase, for a total of eighteen tries over a wireless telephone system, radio frequency network or a telephone line service.
78. The apparatus of claim 77 wherein said protocol software includes means to suspend transmission from the apparatus to wait for the recovery of loss of carrier over a wireless telephone system, radio frequency network or a telephone line service.
79. The apparatus of claim 78 wherein said protocol software includes means to switch the mode of operation of said apparatus from synchronous to asynchronous if carrier loss occurs during transmission in the synchronous mode of operation and to switch back to the synchronous mode upon recovery of the carrier over a wireless telephone system, radio frequency network or a telephone line service.
80. An apparatus for transmission of standard or fax digital signals over ordinary telephone line service, radio frequency network, satellite system or a wireless telephone system and for transmitting analog signals over the telephone line service, the radio frequency network, the satellite system and the wireless telephone system, comprising:
- a modem;
  - a telephone line interface;
  - a microcontroller operatively connected to said modem;
  - a read-only memory operatively connected to said microcontroller;
  - protocol software in said read-only memory in the form of firmware for controlling the operation of the apparatus;
  - a wireless telephone interface for connecting said microcontroller to a wireless

telephone unit;  
a radio frequency interface for connecting said microcontroller to a radio frequency telemetry module or packet radio unit;  
means for providing analog communication over the telephone line, the wireless radio frequency network, the satellite system or the wireless telephone system;  
a first analog switch operatively connecting a first terminal either to said means for providing analog communications or to said modem as decided by the microcontroller;  
a second analog switch operatively connecting said telephone line interface and said wireless telephone interface or not as decided by the microcontroller;  
a third analog switch operatively connecting the first terminal of the first analog switch either to said telephone line interface or to said radio frequency interface as decided by the microcontroller; and  
a fourth analog switch operatively connecting said satellite system to said telephone line interface or not as decided by the microcontroller.

81. The apparatus of claim 80 wherein said protocol software includes means for retrying the connection phase for a total of six tries over a wireless telephone system, radio frequency network, satellite system or a telephone line service.
82. The apparatus of claim 81 wherein said protocol software includes means for retransmitting data packets, after successful connection phase, for a total of eighteen tries over a wireless telephone system, radio frequency network, satellite system or a telephone line service.
83. The apparatus of claim 82 wherein said protocol software includes means to suspend transmission from the apparatus to wait for the recovery of loss of carrier over a wireless telephone system, radio frequency network, satellite system or a telephone line service.
84. The apparatus of claim 83 wherein said protocol software includes means to switch

the mode of operation of said apparatus from synchronous to asynchronous if carrier loss occurs during transmission in the synchronous mode of operation and to switch back to the synchronous mode upon recovery of the carrier over a wireless telephone system, radio frequency network, satellite system or a telephone line service.

85. An apparatus for transmitting digital signals over a telephone landline or a wireless telephone system and for transmitting analog signals over the telephone landline or the wireless telephone system, comprising:
- a modem;
  - a telephone line interface;
  - a wireless telephone interface for operatively connecting to a wireless telephone;
  - means for providing analog communications for transmission over the telephone landline or the wireless telephone system;
  - a first analog switch operatively connecting a first terminal to either said means for providing analog communications or said modem;
  - a second analog switch selectively operatively connecting said telephone line interface and said wireless telephone interface; and
  - a third analog switch selectively operatively connecting the first terminal of the first analog switch with said telephone line interface.
86. An apparatus for transmission digital signals over a telephone landline, a wireless radio frequency network or a wireless telephone system and for transmitting analog signals over the telephone landline, the wireless radio frequency network or a wireless telephone system, comprising:
- a modem;
  - a telephone line interface;
  - a wireless telephone interface for operatively connecting to a wireless telephone;
  - a radio frequency interface for connecting to a radio frequency transceiver unit;
  - means for providing analog communication;
  - a first analog switch operatively connecting a first terminal either to said means for

providing analog communications or to said modem;  
a second analog switch for selectively operatively connecting said telephone line interface and said wireless telephone interface; and  
a third analog switch operatively connecting the first terminal of the first analog switch either to said telephone line interface or to said radio frequency interface.

87. An apparatus for transmission of digital signals over ordinary telephone line service or a wireless telephone system and for transmitting analog signals over the telephone line service, the radio frequency or the wireless telephone system, comprising:

a modem;  
a telephone line interface operatively connected to said modem;  
a wireless telephone interface for connecting to a wireless telephone unit;  
radio frequency interface for connecting to radio frequency telemetry modules or packet radios;  
means for providing analog communication;  
a first analog switch operatively connecting a first terminal either to said means for providing analog communications or to said modem;  
a second analog switch for selectively operatively connecting said telephone line interface and said wireless telephone interface;  
a third analog switch operatively connecting the first terminal of the first analog switch either to said telephone line interface or to said radio frequency interface; and  
a fourth analog switch for selectively operatively connecting a remote device to said telephone line interface.

88. An apparatus for transmission of standard or fax digital signals over ordinary telephone line service, radio frequency network, satellite system or a wireless telephone system and for transmitting analog signals over the telephone line service, the radio frequency network, the satellite system and the wireless telephone system,

comprising:

a modem;

a telephone line interface operatively connected to said modem;

a wireless telephone interface for connecting to a wireless telephone unit;

a radio frequency interface for connecting to a radio frequency telemetry module or packet radio unit;

means for providing analog communication over the telephone line, the wireless radio frequency network, the satellite system or the wireless telephone system;

a first analog switch operatively connecting a first terminal either to said means for providing analog communications or to said modem;

a second analog switch for selectively operatively connecting said telephone line interface and said wireless telephone interface;

a third analog switch operatively connecting the first terminal of the first analog switch either to said telephone line interface or to said radio frequency interface; and

a fourth analog switch for selectively operatively connecting said satellite system to said telephone line interface.- -.

#### **REMARKS**


A new Abstract of the Disclosure is submitted which is believed to better conform with the added claims.

Claims 45 through 64 were cancelled in the Request for Divisional Application.

The total number of claims remaining in the case is 24 and the total number of independent claims is 8. A check in the amount of \$644.00 is enclosed to cover the filing fee for the Divisional Application and the additional independent claim added by amendment. I authorize the Commissioner to charge any additional fees that may be required or to credit any overpayment to Deposit Account No. 20-1123.

It is believed that all of the claims are in condition for allowance and an early indication of allowance of claims 65 through 88 is earnestly solicited.

Respectfully submitted,



W. Thomas Timmons  
Registration No. 27,839  
TIMMONS & KELLY  
The White House on Turtle Creek  
2401 Turtle Creek Blvd  
Dallas TX 95219-4760  
TEL: (214) 528-1881  
FAX: (214) 528-1882

09145137 083198  
861880 2E154160

## Method and Apparatus for Transmission of Digital and Analog

### Abstract of the Disclosure

A modem-controller for auto switching and controlling the transmission and receiving of analog and error-free transmission of standard digital signals, fax digital signals and analog communications over telephone line service, radio frequency networks, satellite systems, as well as wireless telephone systems includes analog switches that receive control signals from the micro-controller for controlling and switching the analog or digital path of an internal analog board and the signals from a modem to and from a radio frequency transceiver via a radio frequency transceiver interface/logic board, a wireless telephone transceiver via a wireless telephone transceiver interface, a telephone landline via a telephone line interface, a satellite system via a telephone landline through the telephone line interface. A method selects the telephone line interface which either connects to the telephone line, the satellite system or the wireless telephone, and another method bypasses the telephone line interface, selects and controls radio frequency telemetry modules or packet radios. The operation of the modem-controller is divided into three modes comprising a command mode, a digital mode and an escape mode. The software is a set of digital communication protocols which provide error-free communication of digital and define a file transfer protocol at the application layer, the session protocol and the link protocol.

09445137 083438  
85780 4ET54T60

P-8078CIP2B



PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the patent application of

Walker C. Morris

Inventor: Walker C. Morris

Serial No.: 08/711,515

Filing Date:

Divisional of:

Serial No.: 08/314,533

Filing Date: September 28, 1994

File Wrapper Continuation of:

Serial No.: 07/828,527

Filing Date: January 28, 1992

Title: METHOD AND APPARATUS FOR TRANSMISSION OF VOICE AND DATA

Examiner: V. Shankar

Art Unit: 2614

**PRELIMINARY AMENDMENT**

The Honorable Commissioner  
of Patents and Trademarks  
Washington, D.C. 20231

Sir:

Please amend the above identified application as follows:

Amend the title by inserting after the word "Transmission" the word --of--.

Amend the Abstract of the Disclosure by substituting the enclosed page in its entirety.

In the specification, on page 10, in line 1, please delete the word "RAM" and substitute therefor the words --read-only memory (RAM)--.

Please amend the claims as follows:

Please cancel claim 9, the only original claim remaining in the application, and substitute the following claims therefor:



- 
45. An apparatus for transmitting data signals over a telephone landline or a cellular telephone system and for transmitting voice signals over the telephone landline or the cellular telephone system, comprising:
- a modem;
  - a data access arrangement including means for operatively connecting to the telephone landline;
  - a microcontroller;
  - a memory operatively connected to said microcontroller;
  - protocol software in said memory for controlling the operation of the apparatus;
  - a cellular telephone interface for operatively connecting to a cellular telephone;
  - means for providing voice communications for transmission over the telephone landline or the cellular telephone system;
  - a first analog switch operatively connecting a first terminal to either said means for providing voice communications or said modem as decided by the microcontroller;
  - a second analog switch operatively connecting said data access arrangement and said cellular telephone interface or not as decided by the microcontroller; and
  - a third analog switch operatively connecting the first terminal of the first analog switch with said data access arrangement or not as decided by the microcontroller.
46. The apparatus of claim 45 wherein said protocol software includes means for retrying the connection phase for a total of six tries.
47. The apparatus of claim 46 wherein said protocol software includes means for retransmitting data packets, after successful connection phase, for a total of eighteen tries.
48. The apparatus of claim 47 wherein said protocol software includes means to suspend transmission to wait for the recovery of loss of carrier.

49. The apparatus of claim 48 wherein said protocol software includes means to switch the mode of operation of said modem from synchronous to asynchronous if carrier loss occurs during transmission in the synchronous mode of operation and to switch back to the synchronous mode upon recovery of the carrier.
50. An apparatus for transmission data signals over a telephone landline, a wireless radio frequency network or a cellular telephone system and for transmitting voice signals over the telephone landline, the wireless radio frequency network or a cellular telephone system, comprising:
- a modem;
  - a data access arrangement including a means for operatively connecting to the telephone landline;
  - a microcontroller operatively connected to said modem;
  - a memory operatively connected to said microcontroller;
  - protocol software in said memory for controlling the operation of the apparatus;
  - a cellular telephone interface for operatively connecting to a cellular telephone;
  - a radio frequency interface for connecting to a radio frequency transceiver unit;
  - means for providing voice communication using a microphone and speaker;
  - a first analog switch operatively connecting a first terminal to either said means for providing voice communications or said modem as decided by the microcontroller;
  - a second analog switch operatively connecting said data access arrangement and said cellular telephone interface or not as decided by the microcontroller; and
  - a third analog switch operatively connecting the first terminal of the first analog switch with either said data access arrangement or said radio frequency interface as decided by the microcontroller.
51. The apparatus of claim 50 wherein said protocol software includes means for retrying the connection phase for a said number of tries.
52. The apparatus of claim 51 wherein said protocol software includes means for retransmitting data packets, after successful connection phase, for a said number of

tries.

53. The apparatus of claim 52 wherein said protocol software includes means to suspend transmission to wait for the recovery of loss of carrier.
54. The apparatus of claim 53 wherein said protocol software includes means to switch the mode of operation of said modem from synchronous to asynchronous if carrier loss occurs during transmission in the synchronous mode of operation and to switch back to the synchronous mode upon recovery of the carrier.
55. An apparatus for transmission of data signals over ordinary telephone line service or a cellular telephone system and for transmitting voice signals over the telephone line service, the radio frequency or the cellular telephone system, comprising:  
a modem;  
a data access arrangement operatively connected to said modem and including a  
    means to operatively connect to a telephone line;  
a microcontroller operatively connected to said modem;  
a memory operatively connected to said microcontroller;  
protocol software in said memory for controlling the operation of the apparatus;  
a cellular telephone interface for connecting to a cellular telephone unit;  
radio frequency interface for connecting to radio frequency telemetry modules or  
    packet radios;  
means for providing voice communication using a microphone and speaker;  
a first analog switch operatively connecting a first terminal to either said means for  
    providing voice communications or said modem as decided by the  
    microcontroller;  
a second analog switch operatively connecting said data access arrangement and said  
    cellular telephone interface or not as decided by the microcontroller;  
a third analog switch operatively connecting the first terminal of the first analog  
    switch with either said data access arrangement or said radio frequency  
    interface as decided by the microcontroller; and

a fourth analog switch operatively connecting a remote device to said data access arrangement or not as decided by the microcontroller.

56. The apparatus of claim 55 wherein said protocol software includes means for retrying the connection phase for a total of six tries over a cellular telephone system, radio frequency network or a telephone line service.
57. The apparatus of claim 56 wherein said protocol software includes means for retransmitting data packets, after successful connection phase, for a total of eighteen tries over a cellular telephone system, radio frequency network or a telephone line service.
58. The apparatus of claim 57 wherein said protocol software includes means to suspend transmission from the apparatus to wait for the recovery of loss of carrier over a cellular telephone system, radio frequency network or a telephone line service.
59. The apparatus of claim 58 wherein said protocol software includes means to switch the mode of operation of said apparatus from synchronous to asynchronous if carrier loss occurs during transmission in the synchronous mode of operation and to switch back to the synchronous mode upon recovery of the carrier over a cellular telephone system, radio frequency network or a telephone line service.
60. An apparatus for transmission of standard or fax data signals over ordinary telephone line service, radio frequency network, satellite system or a cellular telephone system and for transmitting voice signals over the telephone line service, the radio frequency network, the satellite system and the cellular telephone system, comprising:  
a modem;  
a data access arrangement operatively connected to said modem and including a means to operatively connect to a telephone line;  
a microcontroller operatively connected to said modem;

004437 00349  
05 FEB 00 12:54 PM

a read-only memory operatively connected to said microcontroller;  
protocol software in said read-only memory in the form of firmware for controlling  
the operation of the apparatus;  
a cellular telephone interface for connecting said microcontroller to a cellular  
telephone unit;  
a radio frequency interface for connecting said microcontroller to a radio frequency  
telemetry module or packet radio unit;  
means for providing voice communication using a microphone and speaker over the  
telephone line, the wireless radio frequency network, the satellite system or  
the cellular telephone system;  
a first analog switch operatively connecting a first terminal to either said means for  
providing voice communications or said modem as decided by the  
microcontroller;  
a second analog switch operatively connecting said data access arrangement and said  
cellular telephone interface or not as decided by the microcontroller;  
a third analog switch operatively connecting the first terminal of the first analog  
switch with either said data access arrangement or said radio frequency  
interface as decided by the microcontroller; and  
a fourth analog switch operatively connecting said satellite system to said data  
access arrangement or not as decided by the microcontroller.

61. The apparatus of claim 60 wherein said protocol software includes means for retrying the connection phase for a total of six tries over a cellular telephone system, radio frequency network, satellite system or a telephone line service.
62. The apparatus of claim 61 wherein said protocol software includes means for retransmitting data packets, after successful connection phase, for a total of eighteen tries over a cellular telephone system, radio frequency network, satellite system or a telephone line service.
63. The apparatus of claim 62 wherein said protocol software includes means to suspend

transmission from the apparatus to wait for the recovery of loss of carrier over a cellular telephone system, radio frequency network, satellite system or a telephone line service.

64. The apparatus of claim 63 wherein said protocol software includes means to switch the mode of operation of said apparatus from synchronous to asynchronous if carrier loss occurs during transmission in the synchronous mode of operation and to switch back to the synchronous mode upon recovery of the carrier over a cellular telephone system, radio frequency network, satellite system or a telephone line service.--.

#### REMARKS

A new Abstract of the Disclosure is submitted which is believed to comply with the suggestions of the Examiner.

Claims 1-8 and 10-44 were cancelled in the Request for Divisional Application, and Claim 9 was cancelled in this Preliminary Amendment.

The total number of claims remaining in the case is 19 and the total number of independent claims is 4. A check in the amount of \$414.00 is enclosed to cover the filing fee for the Divisional Application and the additional independent claim added by amendment. I authorize the Commissioner to charge any additional fees that may be required or to credit any overpayment to Deposit Account No. 20-1123.

It is believed that all of the claims are in condition for allowance and an early indication of allowance of claims 45 through is earnestly solicited.

Respectfully submitted,



W. Thomas Timmons  
Registration No. 27,839  
TIMMONS & KELLY  
The White House on Turtle Creek  
2401 Turtle Creek Blvd  
Dallas TX 75219-4760  
TEL: (214) 528-1881  
FAX: (214) 528-1882

10 Sept. 96

## Method and Apparatus for Transmission of Data and Voice

### Abstract of the Disclosure

A modem-controller for auto switching and controlling the transmission and receiving of voice and error-free transmission of standard data signals, fax data signals and voice communications over telephone line service, radio frequency networks, satellite systems, as well as cellular telephone systems includes analog switches that receive control signals from the micro-controller for controlling and switching the audio or data path of an internal voice board and the analog signals from a modem to and from a radio frequency transceiver via a radio frequency transceiver interface/logic board, a cellular telephone transceiver via a cellular telephone transceiver interface, a telephone landline via a data access arrangement (DAA), a satellite system via a telephone landline through the DAA. A method selects the DAA which either connects to the telephone line, the satellite system or the cellular telephone, and another method bypasses the DAA, selects and controls radio frequency telemetry modules or packet radios. The operation of the modem-controller is divided into three modes comprising a command mode, a data mode and an escape mode. The software is a set of data communication protocols which provide error-free communication of data and define a file transfer protocol at the application layer, the session protocol and the link protocol.



-1-

### Description

#### Method and Apparatus for Transmission Data and Voice

##### Technical Field

5           The present invention relates in general to the control, transmission and reception of standard data, fax data and voice signals. More particularly, but not by way of limitation, it relates to a distinct method and apparatus for the auto-selecting and auto-routing of  
10 either standard data, fax data or voice communication over a cellular telephone system, a radio frequency (RF) network, a satellite system or telephone line service or a combination of communication services.

##### Background Art

15           In recent years, with the increased emphasis on and use of portable or laptop computers and the availability of the cellular telephone system, radio frequency networks and satellite systems, more and more people are  
20 finding the need for, and the desirability of combining the portable or laptop computer with radio frequency networks, cellular telephone systems, satellite systems and conventional telephone line service to not only send and receive voice signals but to send and receive  
25 digital standard data and fax data between remote sites.

          It is well known to send digital standard data or information over telephone lines from one to another by the use of conventional telephone line type modems. The conventional telephone line type modem is not reliable  
30 over cellular telephone systems, radio frequency networks or satellite systems.

          There are other error-correcting modems able to send and receive standard data over cellular telephone

0044543 0854560



systems, and other modems able to send and receive standard data over radio frequency networks, and other modems able to send and receive standard data over satellite systems, but none have the capabilities to work with all four; telephone line service, radio frequency networks, satellite systems and cellular telephone systems.

One modem that connects to a computer and a cellular phone is able to send and receive standard data over cellular and land line telephone systems; the Bridge modem. It will not communicate to a conventional telephone line type of modem, but using the Bridge's host modem; the Span modem, connected to a computer and a telephone line, the Bridge modem is able to achieve error-free standard data communication over cellular telephone systems. It is rated at 1200 bps, but with the overhead of it's proprietary error correcting scheme, the throughput of the Bridge is no more than 80%. The Span modem, if it is manually switched to non-cellular mode, will work with a conventional telephone line type of modem via telephone line; but the Span modem, connected to a computer and a telephone line, is unable to distinguish or auto switch from a cellular incoming Bridge call or an incoming conventional telephone line type of modem call. This makes the Span modem unsuitable as a host type of modem where you have incoming cellular and conventional telephone line type modem calls. Two separate modems, a Span modem and a conventional telephone line type of modem on two separate telephone lines would have to be used to handle this situation. The Bridge or Span modems do not support voice or fax communication over wireless radio frequency telemetry

modules, packet radios, satellite systems or telephone line communications.

The standard data communications discussed above is the serial type of standard data communications which has two different forms, namely synchronous and asynchronous.

Synchronous communication requires the use of a common clock between the communication systems. Compared to asynchronous communication, synchronous communication is faster, but is also requires more complex controlling software as well as hardware for it to properly transmit and receive standard data. One of the primary applications of synchronous communication is in high-speed computer-to-computer or DTE to DTE communications.

Asynchronous communication does not require a common clock between the two communication systems; thus, the two systems are not synchronized with each other. Instead of sharing a common clock, each system has its own clock, which, in order to communicate properly, must be very close to the clock rate of the other system. Because there is no common synchronizing clock between asynchronous systems, they are limited to slower speeds. Modems used by the personal computer owner are typically asynchronous.

During the transfer or sending of large amounts of digital data (such as a standard file transfer or fax), it is important that errors do not occur and if they do occur it is important to discover and correct any such errors in the data.

The solution to the problem is to have communications software monitor the accuracy of the transferred standard or fax data and request that

standard or fax data be sent again when errors are detected. Software techniques for doing this are called protocols. The error detection and correction procedure allows for the detection of and orderly recovery from errors caused by factors outside the control of the computer at either end. Signal quality deterioration, interference or noise, hand-off, and loss of carrier are some of the primary problems in the transfer of standard or fax data over rural telephone lines, cellular telephone systems, satellite systems and radio frequency networks.

There is a need to be able to have voice communication and error-free transmission of digital standard and fax data over cellular telephone systems, telephone line service, satellite systems and radio frequency networks from a remote type of DTE to a host type DTE connected to a telephone line type of modem-controller capable of distinguishing and auto switching from an incoming cellular call, conventional telephone line call, satellite system call, or radio frequency call and to transmit and receive at a rate higher than 1200 baud.

U.S. Patent No. 4,456,793 to Baker et al. shows a computer with an optical link and an optical transceiver mounted in a ceiling or other high place.

#### Disclosure of the Invention

A method and apparatus (modem-controller) for auto switching and controlling the transmission and receiving of voice and error-free transmission of standard data signals, fax data signals and voice communications over telephone line service, radio frequency networks, satellite systems, as well as cellular telephone systems.

is provided and is operatively connected to computers or other types of DTE, a method to select a data access arrangement (DAA) which either connects to a telephone line, satellite system or a cellular telephone, and  
5 another method to bypass the DAA and select and control radio frequency telemetry modules or packet radios. The apparatus includes analog switches that receive control signals from the micro-controller for controlling and switching the audio or data path of the internal voice  
10 board and the analog signals from the data pump to and from a radio frequency transceiver via the radio frequency transceiver interface/logic board, a cellular telephone transceiver via the cellular telephone transceiver interface, a telephone landline via a data  
15 DAA, a satellite system via a telephone landline through the DAA. Therefore, voice signals from the voice board, standard data or fax data from a computer or other type of DTE device can be sent over telephone landlines, wireless radio frequency networks, satellite system  
20 networks, cellular telephone system networks and infrared transmission.

With reference to the software implementation, the operation of modem-controller is divided into three modes; comprising a command mode, a data mode and an  
25 escape mode. Therefore, the software is based upon the three modes of operation.

In order to eliminate standard or fax data errors that may occur during signal quality deterioration, interference, noise, hand-off, and loss of carrier using  
30 dirty or poor quality conventional telephone line service, radio frequency networks, satellite systems and cellular telephone systems, the ITC-RM was developed. The ITC Reliable Mode (ITC-RM) enhances and fine tunes

Microcom Networking Protocol (MNP) levels 2, 3, 4 and 5. ITC-RM is programmed in the modem BIOS in an erasable programmable read only memory (EPROM) 16 for modem-controller 120.

5           Microcom Networking Protocol is a set of data communication protocols which provide error correction and data compression services in communication devices like modems over conventional telephone lines. MNP classes 2-4, are for error correction and synchronous data transmission and are in the public domain. Microcom Networking Protocol (MNP) class 5, used for data compression, is licensed by ITC from Microcom.

10           Among the unique advantages offered by the present invention installed in remote computer or DTE is the ITC-Reliable Mode. The ITC-RM enhances and fine tunes MNP for users who require fast, reliable and error-free standard data or fax data transmission over particularly poor lines, such as conventional rural telephone lines, radio frequency networks, satellite systems and cellular telephone systems. The present invention installed in a host computer or DTE is able to distinguish and auto switch from cellular incoming calls, radio frequency calls, satellite incoming calls or incoming conventional telephone line type of modem calls. The present invention installed in a remote computer or DTE communicating to the present invention installed in another remote or host computer or DTE via telephone line service, cellular telephone systems, satellite systems or radio frequency networks is able to transmit and receive standard data and fax data at a rate up to and exceeding 9600 bps.

25           The invention may be installed internally in computers or other type of DTE to communicate over a

09145137 083198  
86780 454760

cellular telephone system, a radio frequency network, a satellite system or telephone line service with other computers or other type of DTE.

Also, an external version of the invention can be  
5 connected to computers or other type of DTE via serial ports to communicate over a cellular telephone system, a radio frequency network, a satellite system or telephone line service with other computers or other type of DTE.

More particularly, but not by way of limitation;  
10 using an enhanced and fine tuned version of MNP such as ITC-RM, the present invention relates to a method and apparatus for transmission of standard data and fax data over a cellular telephone system, radio frequency network, satellite system or a telephone line service  
15 with emphasis upon the error-free transmission and reception of standard data and fax data in an error correcting mode. In one arrangement, the invention includes infrared transmission capability connected to the computer through the modem-controller.

20 The present invention also supports a mode of operation or control that allows an external telephone device such as an external fax machine to interface via the telephone line jack to the cellular telephone interface and then to the cellular telephone transceiver  
25 to do wireless fax transmission over a cellular telephone system.

When either the radio frequency network, cellular telephone system, infrared, satellite system or a telephone line method of communication is used, the  
30 invention automatically switches to the selected method desired and connects to the proper service selected; radio frequency (RF), cellular, satellite or telephone line or a combination of phones or radios, for the

094537 083458  
857E80 4E54760

correct protocol to enable error-free standard data or fax data and voice communication.

The invention is highly flexible, allowing the unit to support multiple protocols currently in use, and supporting future protocols like V.42 compliant error  
5 correction, V.42 bis data compression protocol, and MNP class 10 as they become available.

The invention supports standard data and fax data protocols compatible to Group 3 (G3) fax, CCITT V.22A/B  
10 and V.22 bis, V.23, V.29, V.27 ter, V.21 channel 2 recommendations, and Bell 212A and Bell 103 with auto-fallback. The invention also implements a fine tuned version of Microcom Networking Protocol (MNP) error correcting protocol and data compression classes  
15 2, 3, 4, and 5 called the ITC Reliable Mode (ITC-RM), and operates in non-error-correction mode as well. This provides error-free standard or fax data communication over cellular systems, radio frequency networks, satellite system networks and telephone line service  
20 regardless of line quality.

The invention allows any computer or DTE to be an isolated communication device; when using a speakerphone and dialing telephone numbers, through the use of communication software, using a computer's or DTE's  
25 numeric keypad or numeric keys and can automatically dial or answer through communication software script files.

This invention is distinctive and unique in that it is not a modification or incorporation from existing  
30 apparatus. Until this present invention, there has not been one apparatus capable of the transfer of voice, standard data or fax data through radio frequency networks, cellular telephone systems, satellite systems,

09145137.033196

infrared apparatus and conventional telephone line service in an error-free environment.

Examples of the more important features and advantages of the invention have thus been summarized rather broadly in order that the following detailed description thereof may be better understood and in order that the contribution to the art may be better appreciated. There are, of course, additional features of the invention that will be described hereinafter and which will also form the subject of the claims appended hereto. Other features of the invention will become apparent with reference to the following detailed description of a presently preferred embodiment thereof in connection with the accompanying drawings, wherein like reference numerals have been applied to like elements in which:

#### Brief Description of Drawing

FIGURE 1 is a simplified schematic, in block diagram form, of the preferred embodiment of the present invention;

FIGURE 2 is a simplified flowchart illustrating the connection phase provided by the present invention; and

FIGURE 3 is a simplified flowchart illustrating the data phase provided by the present invention.

#### Best Mode for Carrying Out the Invention

Referring to the drawing and to FIGURE 1 in particular, shown therein and generally designated by the reference character 120, is a preferred embodiment of a modem-controller according to the present invention. Microcontroller 10 is a microprocessor which is employed as the controller for modem-controller 120.



One static RAM 14 is added to the system to provide adequate working space for programming. An erasable programmable read only memory (EPROM) 16 is added to the system to provide enough ROM space for the firmware.

5 RAM 14 and EPROM 16 are operatively connected to microcontroller 10 by data and address bus 12.

Microcontroller 10 executes the firmware or modem BIOS stored in EPROM 16 and manipulates the data in RAM 14 through the data and address bus 12. A decoder in  
10 microcontroller 10 is used to decode the address bus to select RAM 14, EPROM 16 or data pump 18.

Modem-controller 120 communicates with the DTE 2 through the RS232C interface 6 operatively connected to microcontroller 10. In the disclosed embodiment, DTE 2  
15 is a computer or DTE. Ring indicator signal is sent to data pump chip 18 via bus 32.

Data pump chip 18 is operatively connected to microcontroller 10 by data and control bus 20. Data pump chip 18 is a 2400 baud, full duplex, data pump fax  
20 modem device set.

It includes a digital signal processor (DSP) and an integrated analog (IA) device. In addition to digital signal processing on the transmitted data, the DSP provides the interface to microcontroller 10 for  
25 information exchange and controlling. The IA chip functions like a digital to analog converter and an analog to digital converter to manipulate the signal to and from the DSP.

Modem-controller 120 is able to connect to the  
30 normal telephone line 80 through RJ11 jack 116 connected via bus 115 to data access arrangement (DAA) 64 interface and access, via telephone line(s) 80, remote device 102, such as another modem connected to a

0944537 051600 000000

computer or other type of DTE or a Fax machine.  
Modem-controller 120 establishes the connection through  
a dialing process by specific AT commands from the  
keyboard of DTE 2. Although most of the applications of  
5 modem transmission involves dial-up lines,  
modem-controller 120 can also be connected to a leased  
(private) line. Under this condition, special line  
conditioning is not needed and the operation is full  
duplex over this leased line. In other words, there is  
10 not any dialing process required before connection to  
the leased line. The telephone line ring indication  
signal is transferred from the DAA 64 to modem chip 18  
via bus 32 while the -OHRELAY, MUTE and -T/D RELAY  
signals are transferred to DAA 64 from modem chip 18 via  
15 bus 34.

When an incoming call is present, the ring  
indication signal is recognized by the Integrated Analog  
(IA) Device of modem chip 18 with appropriate control  
signals being sent to DAA 64 by modem chip 18. The  
20 assertion of the -OHRELAY signal causes an offhook  
(online) function to be performed. The -T/D RELAY  
signal controls when telephone line 80 is connected to  
RJ11 jacks 116 through bus 115 to DAA 64. MUTE is a  
signal controlled by microcontroller 10 to reduce the  
25 transient effects during offhook and onhook operations  
due to the on/off of the relay controlled by the  
-OHRELAY signal.

The switching or routing of standard or fax data or  
voice to radio frequency telemetry module or packet  
30 radio interface 110, DAA 64 to RJ11 jacks 115, or  
cellular telephone interface 104 is performed by analog  
switches 70, 74, 78 which may be comprised of analog  
multiplexer/demultiplexer chips. Analog switch 70 is

controlled by the telephone line select (TL-SEL) signal from microcontroller 10 via bus 68. Analog switch 74 is controlled by cellular phone interface select (CPI-SEL) signal from microcontroller 10 via bus 72. Analog switch  
5 78 is controlled by RF radio interface select (RFI-SEL) signal from microcontroller 10 via bus 76.

The auto switching between standard or fax data mode and voice mode is performed by analog switches 44 which may be comprised of a analog  
10 multiplexer/demultiplexer chip. Analog switch 44 is controlled by voice-or-data select (VORD-SEL) signal from microcontroller 10 via bus 42. This VORD-SEL signal from microcontroller 10 is controlled by a AT command suffix, alpha character "v", received from DTE 2 through  
15 bus 4, RS232C 6 and bus 8. If a dialing command is received by the microcontroller and it ends in the alpha character "v", a VORD-SEL signal will be sent to analog switch 44 to select the voice mode.

If a dialing command is received by microcontroller  
20 10 and it does not have the alpha character "v" as a suffix, a VORD-SEL signal will be sent to analog switch 44 to select the standard or fax data mode. If analog switch 44 is in the standard or fax data select position, selected by microcontroller 10 VORD-SEL  
25 signal, analog switches 70, 74 and 78 allow the analog signals transmitted from and received by modem chip 18 to be routed either to RJ11 jacks 115 or cellular phone interface 104 via bus 36, amplifier 38, bus 40, analog switch 44, bus 62, analog switch 78, bus 96, DAA 64, and  
30 bus 66 or to radio frequency interface 110 via bus 36, amplifier 38, bus 40, analog switch 44, bus 62, analog switch 78, bus 98. If analog switch 44 is in the voice select position, selected by microcontroller 10 VORD-SEL .

09445137 083498

signal, analog switches 70, 74 and 78 allow voice communication transmitted from and received by internal voice board 52 to be routed either to RJ11 jacks 116, radio frequency interface 110 and cellular phone interface 104 via external mike 60, bus 56, external speaker 58, bus 54, voice board 52, bus 50, amplifier 48, bus 46, analog switch 44, bus 62, analog switch 78, and either bus 96 to DAA 64, and bus 66 or bus 98 to radio frequency interface 110.

The present invention also supports another mode of operation or control. Another type of telephone device such as an external fax machine can interface via telephone line 80, RJ11 jacks 116, bus 115, bus 82, analog switch 88, bus 100 to the cellular phone interface 104, bus 106, and then to the cellular telephone 108 to do wireless external fax transmission over a cellular telephone system.

This mode is controlled by the microcontroller 10 and if the following conditions exist: A cellular telephone 108 is connected, their corresponding interface, cellular telephone interface 104 is switched on, and a telephone device is attached to the RJ11 jacks 116. The switching or routing of the telephone line 80 to the cellular phone interface 104 is performed by analog switches 88 which may be comprised of analog multiplexer/demultiplexer chips. Analog switch 88 is controlled by the CPI-SEL signal 72 and LL-SEL signal 68 from microcontroller 10 via bus 86.

In summary, different operations can be performed by different settings of the analog switches 44, 70, 74, 78, and 88 hence different routing of the signals.

When standard or fax data is being sent from or received at modem chip 18 on bus 40, the same signals

00145137 083499

are sent to amplifier 48 via bus 122. A mute signal is also sent to amplifier 48 from microcontroller 10 via bus 22. Amplifier 48 then outputs a mute signal on bus 50 to voice board 52 to disable speaker 58 during the transmission and receipt of standard or fax data from or to modem chip 18.

The cellular telephone 108 connected to modem-controller 120 is full duplex radio telephone for use in cellular telephone systems. It consists of an internal transmitter and receiver (transceiver) unit, keypad, display, antenna, mike and speaker. The cellular telephone provides full duplex synthesized FM radio channels for voice and standard or fax data transmission between the cell site base stations.

The design strategy of the cellular phone interface 104 is to provide a simulation of a telephone line tip and ring from a cellular telephone 108 for connection to DAA 64 of modem-controller 120. In other words, when cellular mode is selected by microcontroller 10, a interface through DAA 64 to cellular phone interface 104 and then cellular telephone 108 is made and voice and standard or fax data transmission through cellular telephone 108 is made like it is a ordinary telephone line.

The 800 MHz radio frequency packet radio 114 connected to modem-controller 120, when interfaced, is a half-duplex radio with synthesized frequency selection for operation in the 800 MHz band for transmitting and receiving and provides 3 watts of output power. Using two 800 MHz radio frequency packet radio modules 114 and 115, connected to modem-controller 120, full duplex operation is achieved.

004453.003493  
05 FEB 80 12:54:60

The 800 MHz radio frequency telemetry module 114 connected to modem-controller 120, when interfaced, contains both a data transmitter and a data receiver (transceiver). It has manual or user programmable synthesized frequency selection for half-duplex operation on a single channel in the 806 - 824 MHz receive and 851 - 869 MHz transmit frequency range. The transmitter power output is 1 watts at 7.2 volts. It uses 25 kHz channel spacing. Using two 800 MHz radio frequency telemetry modules 114 and 115, connected to modem-controller 120, full duplex operation is achieved.

The 450 MHz radio frequency telemetry module 114 connected to modem-controller 120, when interfaced, contains both a data transmitter and a data receiver (transceiver). It has synthesized frequency selection for half-duplex operation on a single channel in the 450 - 480 MHz or 403 - 430 MHz transmit frequency range. The transmitter power output is 2 watts at 7.2 volts. It uses 25 kHz or optional 12.5 kHz minimum channel spacing. Using two 450 MHz radio frequency telemetry modules 114 and 115, connected to modem-controller 120, full duplex operation is achieved.

The design strategy of the radio frequency interface 110 is to provide an interface and the logic required by radio frequency 450 MHz or 800 MHz telemetry module(s) 114 and 115 or the 800 MHz packet radios 114 and 115 for connection to modem-controller 120. In other words, when radio frequency mode is selected by microcontroller 10, a interface through bus 98, RF radio interface/logic board 110, bus 112 and 113 and then to one or two (one for half duplex operation or two for full duplex operation) radio frequency telemetry module(s) or packet radio(s) 114 and 115 are made and voice and standard or.

fax data transmission through the telemetry module(s) or packet radio(s) 114 and 115 is accomplished.

5 The RS232C standard defines the interface between DTE 2 and microcontroller 10 and modem chip 18. Commands entered from DTE 2 is sent via RS232C cable 4, RS232C interface 6, and bus 30 by asynchronous transmission into serial port, bus 8 to microcontroller 10.

10 Modem-controller 120 contains a high performance 2400/9600 baud data pump that supports 9600 baud fax and 2400 baud standard data speeds and is designed such that it can be used for standard data or fax data transmission and receiving with ordinary telephone lines, radio frequency (RF), satellite systems and cellular systems. Unlike conventional modems, it does not provide any hardware jumpers or switch settings and thus eliminates the inconvenience of hardware jumpers or switch settings for ease of operation to non-technical users. Instead, the alteration of all functional features can be thoroughly accessed through AT commands and settings of S registers through communication software.

20 Modem-controller 120 is a Hayes compatible modem, including most of the AT commands implemented in Hayes Smartmodem except those commands for synchronous transmission and speaker control. In order to increase the efficiency, full-duplex operation is supported during communication. Modem-controller 120 can establish connection with various speeds such as 300 baud, 600 baud, 1200 baud, 2400 baud, 4800 baud (fax), 9600 baud (fax) under different communication protocols. Retrain sequence is automatically detected and sent to maintain proper communication environment between calling and answering modem during connection. Auto answer mode is

activated by setting up the ring count value before connection.

Modem-controller 120 can establish the connection in either originate mode or answer mode directly selected by the software. Pulse and tone dialing are both supported in modem-controller 120 with software selection of the pulse and tone dialing format.

One of the unique features of modem-controller 120 is the capability of connection with a cellular telephone 108, satellite system radio, or a radio frequency telemetry module or packet radio 114. This enhances it's portability when installed in hand held, portable or lap-top computers or DTE (DTE). In addition to standard data or fax data transmission, modem-controller 120 provides the function for voice communication. Together with voice board 52, the user can establish voice conversation in a hands-free mode whether connected to telephone lines 80, satellite systems, radio frequency networks and cellular telephone systems 108.

In order to eliminate standard or fax data errors that may occur during signal quality deterioration, interference or noise, hand-off, and loss of carrier using dirty or poor quality conventional voice telephone lines, radio frequency networks, satellite systems, and cellular telephone systems, the ITC-RM was developed. The ITC-RM enhances and fine tunes MNP levels 2, 3, 4 and 5. ITC-RM is programmed in the modem BIOS or firmware in an EPROM 16 for modem-controller 120.

In the present invention, modem-controller 120 can be connected to a cellular telephone 108, satellite system, or a radio frequency telemetry module or packet radio 114. Carrier loss happens more frequently in



09145137 083198  
061600 261600

wireless systems than in a ordinary telephone lines. The modem-controller, using ITC-RM, adapts to the unhealthy working environment of wireless systems by increasing the re-try count from two to six in the link phase. The link-up is first initiated at 2400 BAUD. If a 2400 BAUD link-up fails, the modem-controller, using the ITC Reliable Mode (ITC-RM), will down-shift to 1200 BAUD. After successful connection, the modem-controller, using the ITC Reliable Mode (ITC-RM), will set the packet re-try count to eighteen. During carrier loss, the modem-controller, using the ITC-RM, will temporarily suspend standard and fax data transmission to wait for the recovery of the carrier. If the carrier loss occurs in synchronous mode, the modem-controller, using the ITC-RM, will switch back to asynchronous mode until detection of the carrier occurs and will then switch back to synchronous mode. In other words, even if the carrier is lost, the modem-controller will not "hang up".

With reference to the software implementation, the operation of modem-controller 120 is divided into three modes comprising a command mode, a data (standard or fax) mode and an escape mode; therefore, the software is based upon the three modes of operation.

In the command mode, modem-controller 120 receives the input via the serial port through the RS232C interface 6. If the echo command is on (ATE1), the same character which is input will be fed back to the DTE 2.

Modem-controller 120 accepts the standard AT command set prefix 'AT' or 'A/' to repeat last command. If the input character is 'A', modem-controller 120 will wait for the typing of 'T' or '/'. If not received, modem-controller 120 will repeat the process for the

next 'A'. After receiving a correct command prefix  
'AT', modem-controller 120 will start to accept typing  
as AT command and will store them in the command buffer  
until a carriage return is entered. Modem-controller  
5 120 will then process the commands in the command buffer  
and output corresponding messages to the DTE 2 via the  
serial port. If an incorrect command is sent, an error  
message will be displayed. On the other hand,  
modem-controller 120 will not wait for the input of a  
10 carriage return if 'A' is captured first. Instead, it  
will repeat the last entered command in the command  
buffer.

One of the smart features in the command mode is the  
capability of auto baud rate checking and auto format  
15 adjustment. This is established by the inspection of  
the AT command prefix 'AT' and 'A/'. At this stage, the  
reception of the prefix is done on bit manipulation  
instead of accepting the whole character through the  
serial port of the microcontroller 10. The start bit  
20 duration of the typed character is measured and hence  
the current communication baud rate is determined.  
According to the measured baud rate, the succeeding bits  
will be sampled and captured, also the input character  
is then found. If this is a character 'A', then the  
25 next character is captured in the same manner except  
that the duration of its start bit need not be measured  
again. If the next character is 'T' or '/', the process  
of auto baud rate check will then be completed.

The format of asynchronous communication protocol  
30 (parity bit, data bit, stop bit) is also determined  
during the capture of the command prefix. This is  
achieved by the sampling of bit 8 and bit 9 of the  
character 'A' and valid character 'T' or '/'. From the

different combination of these bits, specific format of protocol is recognized. Afterward, the serial communication that follows will employ the serial port of the microcontroller 10 since the baud rate and format have been decided.

If there is an incoming call, the ring signal (ring indication) will be detected and a 'RING' message will be shown for each ring.

If the number of rings received is equal to the value stored in the S0 register or the 'ATA' command is entered, modem-controller 120 will connect the line to answer the coming call. It will then switch to standard or fax data mode for transmission.

To initiate a standard data call, the command 'ATD' is entered and then followed by the dialed number. Modem-controller 120 will check for the presence of a dial tone and then for a busy tone after completing the dialing process. At the end of the dialing process, modem-controller 120 will wait for the presence of the carrier within the time specified by the value in S7 register. If a carrier is detected and connection is successful, standard data mode is entered. Otherwise the call process is aborted.

To initiate a fax data call, a specialized fax software is employed that lets you simply enter a phone number to dial, be it stored or manual, and press a key to dial. All AT commands are in the background and not entered by the user. Modem-controller 120 will check for the presence of a dial tone and then for a busy tone after completing the dialing process. At the end of the dialing process, modem-controller 120 will wait for the presence of the carrier within the time specified by the value in S7 register set by the specialized fax

software. If a carrier is detected, connection is successful, fax data mode is entered. Otherwise the call process is aborted.

5 To initiate a voice call, the command 'ATD' is entered, followed by the dialed number and the suffix 'v'. Modem-controller 120 will check for the presence of a dial tone and then for a busy tone after completing the dialing process. At the end of the dialing process, modem-controller 120 will wait for the calling party to  
10 answer and on answering, voice mode is entered. Otherwise the call process is aborted. The carrier tone is disabled in the voice mode.

Because modem-controller 120 employs ITC-RM, which enhances and fine tunes MNP levels 2, 3, 4 and 5 to  
15 eliminate standard data errors that may occur using dirty or poor quality conventional voice telephone lines, radio frequency networks, satellite systems and cellular telephone systems, there are two absolutely different modes (normal mode and the MNP) with ITC-RM  
20 selectable by the user. For the application of interfacing with a cellular telephone 108, satellite system 118, and the radio frequency telemetry module or packet radio 114 and 115, the enhanced MNP mode using ITC-RM is compulsory for maintaining proper operation  
25 due to the noisy environment and frequently lost carrier. The mode switching is automatically set to this compulsory setting of enhanced MNP mode using ITC-RM if either the radio frequency interface or cellular  
30 telephone interface is switched on or manually controlled by a set of particular AT commands (&E0, &E1, &E2) using communication software for landline and satellite system use.

09145137 083158

5 In the normal mode and without activation of the enhanced MNP mode with ITC-RM, modem-controller 120 handles the data transmission as a conventional modem. It follows the CCITT or BELL recommendation to perform asynchronous transmission at 300, 600, 1200 or 2400 baud. The data flowing between the modems is on a character basis. No error detection and data compression is done using this mode.

10 In the MNP with ITC-RM, transmission is performed in units of data packets. The technique of handshaking is added to normal data transmission in order to achieve error elimination and protocol compatibility. There are different packets named Link Protocol Data Unit (LPDU) defined in MNP for specific purposes.

15 Each LPDU has its own information such as the sequence number and series number and a Cyclical Redundancy Check (CRC) checksum at the end of each LPDU.

20 During the connection phase, information exchange between the calling and called party rely on the transmission of LR LPDU and Link Acknowledgement packet (LA LPDU). Through this three way handshaking, a compromised operating environment will be established for both modem devices. Asynchronous transmission works on these packets. If MNP level three or above can be achieved after the Link phase, then synchronous mode will be selected for data transmission in SDLC frame structure with a view to the increase in efficiency. Otherwise, asynchronous mode will be kept unchanged as usual.

30 The error detection is done by comparing the calculated CRC with the actual CRC which is received for each packet. If errors occurs, an acknowledgement requesting the retransmission of the bad packets will be .

issued. Hence the enhanced MNP with ITC-RM can achieve excellent reliability for data communication over cellular telephone systems and radio frequency networks. A retransmission counter defines the maximum available attempts for retransmission. An inactivity timer keeps track of the silence time (no information exchange) after the line is connected. If the above time limitation is violated, the transmission will be terminated at once thereby indicating that the current working environment is abnormal and hence the line should be disconnected.

In normal operation, the data packets will be sent in order by the sender modem according to their sequence number specified during transmission. For a successful receipt of a data packet (LD LPDU), the receiver must issue the positive acknowledgment to the sender to indicate the correct receipt of the packet. This is accomplished by placing the sequence number of the data packet in the LA LPDU packet. In order to alleviate the overhead caused by the frequently transmitted LA packet, the receive modem does not need to make an immediate response to each data packet received. Instead, it permits the delay of the transmission of LA packets within the extent of the window size (four data packets in the inventive protocol). The receive modem will send the sequence number of the latest good data packet received. As a result, all of the packets with sequence numbers earlier than that in the LA packet which is acknowledged are positively acknowledged by only one transmission of the LA packet.

If modem-controller 120 is operating in the escape mode, all the AT commands can be used. The typing of the escape sequence '+++' in the data mode will switch

09145137.083498

the modem-controller 120 to the escape mode for the access of AT commands. On the contrary, the command 'ATO' will bring the modem-controller back to the data (online) mode once again.

5       With reference to FIGURE 2, the connection phase of the inventive protocol software, prior to the transmission of data, is disclosed.

86T89" ZETST60  
10       The line, either telephone line, radio frequency, infrared, satellite system or cellular, is connected (line is connected 128) between the local and remote modem either through the dialing process or a leased-line operation. Desired communication configuration (establish desired communication 130) is established with a remote modem through handshaking.  
15       The presence of the carrier from the remote modem (carrier present 132) is determined. If the carrier is not present within a specified time (times up 136) then the connection will be terminated (terminate the connection 134) and the connection phase must be  
20       initiated again. If the carrier is not present and the specified time has not elapsed, then the presence of the carrier from the remote modem (carrier present 132) will continue until the specified time has elapsed or the presence of the carrier occurs. With the carrier being  
25       present, the remote modem is interrogated (interrogate the remote modem 138) by sending appropriate link-connect packet to the remote modem.

30       If the correct link-connect packet 140 is received from the remote modem then the MNP with the ITC-RM connection is successful 142 and the next step is (go to data phase 144) as shown in FIGURE 3. If the correct link-connect packet 140 is not received, then the correct link-connect packet 140 is repeated through the

Retry-Count 146 step until successful receipt of the correct link-connect packet is received or until the Retry-Count = 6 step 148 equals the count of six. At that time, the MNP with ITC-RM connection fails 150 and a line disconnect 152 or the connection phase is run in the non-MNP mode and ITC-RM.

With reference to FIGURE 3, the data phase of the inventive protocol software, after the successful connection phase, is disclosed. From data phase 144, the presence of the carrier (carrier present 158) is determined. If the carrier is present, then the determination is made as to the readiness of a data packet (data packet is ready 160) for transmission. If the carrier is not present, then the modem is switched to the asynchronous mode (switch to asynchronous mode 162) and the presence of the carrier (carrier present 164) is determined. Upon the presence of a carrier, modem-controller 10 is switched to the synchronous mode (switch to synchronous mode 166) and the determination is made as to the readiness of a data packet (data packet is ready 160). Upon determination that a data packet is ready for transmission then the data packet is transmitted (transmit this data packet 168) and acknowledgement is noted (positive acknowledgement received 170). If positive acknowledgement received 170 occurs, then the cycle is back to step 158, step 160, step 168 to step 170. This cycle is repeated until transmission is complete or carrier is lost. If positive acknowledgement is not received at step 170, then a check is made to determine if the retransmission timer elapsed 172 has occurred. If it has, then the next step is to the (ReTx - count = ReTx - count + 1) 174 to the step of (ReTx - count = 18) 176. If the ReTx count

09445437 083498



has not reached 18, then the cycle is back to step 168 where the data packet is transmitted again until the ReTx - count = 18. At that time, the MNP with ITC-RM disconnect sequence 178 disconnects the modem from the  
5 telephone line, cellular phone or radio frequency telemetry module or packet radio. Such a disconnect sequence is of the kind that is well known in the art.

If the retransmission timer elapsed 172 has not occurred, then a check is made for a negative  
10 acknowledgement received 180. If a negative acknowledgement 180 has been received, then the next step is step 174 and eventually back to step 168 (transmit this data packet). If a negative acknowledgement has not been received, then the cycle is  
15 back to step 170 (positive acknowledgement received 170) to determine if a positive acknowledgement has been received.

Whenever a positive acknowledgement is received at step 170, that yes status is sent back to step 158 to  
20 check for a carrier present 158 so another data packet may be made ready for transmission as in step 160.

When a data packet is received 182, then an acknowledgement (acknowledge the remote modem 184) is noted and the cycle is back to step 158 to start the  
25 sequence to send another data packet. If a packet is not received (acknowledge the remote modem 184), then the cycle is back to step 158.

In one arrangement, remote device 102 can be replaced by an infrared transceiver. Such an  
30 arrangement can be used on several computers within infrared range of each other to form a network. The area over which the network can operate can be expanded by elevating an infrared relay device.

09445437 083498  
867E80 2E7E4F60

Although the present invention has been described herein with reference to specific forms thereof, it is evident that many alternatives, modifications and variations will become apparent to those skilled in the art in light of the foregoing disclosure. Accordingly, 5 this description is to be construed as illustrative only and is for the purpose of teaching those skilled in the art the manner of carrying out the invention. It is to be understood that the forms of the invention herewith 10 shown and described are to be taken as presently preferred embodiments. Various changes may be made in the shape, size and arrangement of parts. For example, equivalent elements may be substituted for those illustrated and described herein, parts may be reversed, 15 and certain features of the invention may be utilized independently of other features of the invention. It will be appreciated that various modifications, alternatives, variations, etc., may be made without departing from the spirit and scope of the invention as 20 defined by the appended claims.

0944537 083193  
067630 "ZETSH 150

Claims

1. A method of transmitting data signals in a synchronous mode over a telephone landline, a wireless  
5 radio frequency network or a cellular telephone system from a sending modem to a receiving modem without incurring errors in the transmitted data signals from loss of carrier or a noisy transmission environment by using a modified network protocol, said method  
10 comprising the steps of:
- auto selecting of either landline, radio frequency transceivers or cellular telephone transceiver operation;
  - 15 connecting between the sending modem and the receiving modem;
  - establishing desired communication configuration between the sending modem and the receiving modem through handshaking;
  - determining presence of carrier from receiving  
20 modem;
  - terminating the connection between the sending modem and the receiving modem if a predetermined time has elapsed without determining presence of carrier;
  - 25 interrogating the receiving modem by sending appropriate link-connect packet from the sending modem if presence of carrier is determined;
  - determining if a correct link-connect packet is  
30 received at the sending modem from the receiving modem; and
  - determining that the modified network protocol connection between the sending modem and the

receiving modem is successful if a correct link-connect packet is received at the sending modem from the receiving modem.

- 5     2.    The method according to Claim 1 further including the steps of:

          retrying to interrogate the receiving modem a  
          predetermined number of retry counts if the  
          correct link-connect packet is not received  
10           from the receiving modem;  
          choosing between one of two possible modes if not  
          successful in interrogating the receiving  
          modem in the predetermined number of retry  
          counts, and the two possible modes being line  
15           disconnect and a network protocol, other than  
          the modified network protocol, operating mode.

3.    The method according to claim 2 wherein said  
          predetermined number of retry counts is equal to six.

20

4.    The method according to claim 1 further including the steps of:

          determining the presence of carrier from receiving  
          modem;  
25           switching to asynchronous mode if presence of  
          carrier is not determined and then switching  
          to synchronous mode when presence of carrier  
          is determined;  
          readying data packet for transmission to recitation  
30           modem when carrier is present;  
          transmitting data packet to receiving modem;  
          receiving positive acknowledgement from receiving  
          modem; and

repeating the five steps set forth above until a positive acknowledgement is not received from the receiving modem.

- 5     5.    The method according to Claim 4 further including the steps of:

checking if the retransmission timer has elapsed if positive acknowledgement has not been received from the receiving modem;

- 10    checking if a negative a negative acknowledgement has been received from the receiving modem if the retransmission timer has not elapsed;

retransmitting the data packet to the receiving modem if a negative acknowledgement has been received from the receiving modem;

- 15    repeating the three steps set forth above until positive acknowledgement is received form the receiving modem or until the retransmission count reaches a predetermined number; and

- 20    initiating a disconnect sequence if the retransmission count reaches said predetermined number before a positive acknowledgement is received form the receiving modem.

25

6.    The method according to claim 5 wherein said retransmission count is eighteen.

- 30    7.    The method according to Claim 4 further including the steps of:

checking if the retransmission timer has elapsed if a positive acknowledgement has not been received from the receiving modem;

retransmitting the data packet to the receiving  
modem if the retransmission timer has elapsed;  
repeating the two steps set forth above until  
positive acknowledgement is received from the  
5 receiving modem or until the retransmission  
count reaches a predetermined number; and  
initiating a disconnect sequence if the  
retransmission count reaches said  
predetermined number before a positive  
10 acknowledgement is receiving from the  
receiving modem.

8. The method according to Claim 7 wherein said  
retransmission count is eighteen.

9. A modem for transmitting data signals in a  
synchronous mode over a telephone landline or a cellular  
telephone system without incurring errors in the  
transmitted data signals from loss of carrier or a noisy  
20 transmission environment and for transmitting voice  
signals over the telephone landline or the cellular  
telephone system, comprising:

a modem for converting received digital signals to  
analog signals and for converting received  
25 analog signals to digital signals;

a data access arrangement operatively connected to  
said modem and including means to operatively  
connect to the telephone landline;

a microcontroller operatively connected to said  
30 modem;

a read-only-memory operatively connected to said  
microcontroller;

09145137.083198

protocol software in said read-only-memory in the  
form of firmware for controlling the operation  
of the modem;

cellular telephone interface means for connecting  
said microcontroller to a control unit and a  
transceiver unit of the cellular telephone;

a voice board means for providing hands free  
communications over the telephone landline or  
the cellular telephone system;

first analog switch for receiving input from said  
voice board means and providing outputs to  
said data access arrangement and said  
transceiver unit of said cellular telephone;

second analog switch for receiving input from said  
control unit of said cellular telephone and  
providing outputs to said data access  
arrangement and said transceiver unit of said  
cellular telephone;

third analog switch for receiving input from said  
modem and providing outputs to said data  
access arrangement and said transceiver unit  
of said cellular telephone; and

means to connect data terminal equipment to said  
microcontroller through an interface.

10. The modem of claim 9 wherein said protocol software  
includes means for retrying the connection phase for a  
total of six tries.

11. The modem of claim 10 wherein said protocol  
software includes means for retransmitting data packets,  
after successful connection phase, for a total of  
eighteen tries.

12. The modem of claim 11 wherein said protocol software includes means to suspend transmission from the modem to wait for the recovery of loss of carrier.

5 13. The modem of claim 12 wherein said protocol software includes means to switch the mode of operation of said modem from synchronous to asynchronous if carrier loss occurs during transmission in the synchronous mode of operation and to switch back to the  
10 synchronous mode upon recovery of the carrier.

14. A modem for transmission data signals in a synchronous mode over a telephone landline, a wireless radio frequency network or a cellular telephone system  
15 without incurring errors in the transmitted data signals from a loss of carrier or a noisy transmission environment and for transmitting voice signals over the telephone landline, a wireless radio frequency network or a cellular telephone system, comprising:

20 a modem for converting received digital signals to analog signals and for converting received analog to digital signals;  
a data access arrangement operatively connected to said modem and including a means to  
25 operatively connect to the telephone landline;  
a microcontroller operatively connected to said modem;  
a read-only-memory operatively connected to said microcontroller;  
30 protocol software in said read-only-memory in the form of firmware for controlling the operation of the modem;

09445137 083198 86780 7ET54T60



cellular telephone interface means for connected  
said microcontroller to a cellular telephone  
transceiver unit;

radio frequency radio interface/logic board means  
for connected said microcontroller to a radio  
frequency transceiver unit;

a voice board means for providing hands-free  
communication using a microphone and speaker  
over a telephone landline, a wireless radio  
frequency network or a cellular telephone  
system;

analog switch means for receiving inputs from said  
voice board means, said radio frequency  
transceiver, said cellular telephone  
transceiver and said modem and providing  
outputs to said data access arrangement, said  
radio frequency transceiver, and said  
cellular telephone transceiver; and

means to connect data terminal equipment to said  
microcontroller through an interface.

15. The modem of claim 14 wherein said protocol software  
includes means for retrying the connection phase for a  
said number of tries.

16. The modem of claim 15 wherein said protocol software  
includes means for retransmitting data packets, after  
successful connection phase, for a said number of tries.

17. The modem of claim 16 wherein said protocol software  
includes means to suspend transmission from the modem to  
wait for the recovery of loss of carrier.

18. The modem of claim 17 wherein said protocol software includes means to switch the mode of operation of said modem from synchronous to asynchronous if carrier loss occurs during transmission in the synchronous mode of operation and to switch back to the synchronous mode upon recovery of the carrier.

19. A method and apparatus for the auto-selecting and auto-routing of either data or voice communication over a cellular telephone system, a radio frequency network, telephone line service or a combination of communication services from a sending modem-controller to a receiving modem, using an enhanced version of (MNP) protocol called the ITC Reliable Mode (ITC-RM), said method comprising the steps of:

analog switching to receive voice signals and data signals from a plurality of different predetermined input sources and to route the received voice signals and data signals to different predetermined selectable destinations;

automatically connecting between the sending modem-controller and the receiving modem over a cellular telephone system, radio frequency network or a telephone line service;

establishing desired communication configuration between the sending modem-controller and the receiving modem through handshaking over a cellular telephone system, radio frequency network or a telephone line service;

determining presence of carrier from receiving modem over a cellular telephone system, radio frequency network or a telephone line service;

09445137 083498

terminating the connection between the sending  
modem-controller and the receiving modem if a  
predetermined time has elapsed without  
determining presence of carrier over a  
5 cellular telephone system, radio frequency  
network or a telephone line service;

interrogating the receiving modem by sending  
appropriate link-connect packet from the  
sending modem-controller if presence of  
10 carrier is determined over a cellular  
telephone system, radio frequency network or  
a telephone line service;

determining if a correct link-connect packet is  
received at the sending modem-controller from  
15 the receiving modem over a cellular telephone  
system, radio frequency network or a  
telephone line service; and

determining that the modified network protocol  
connection between the sending  
20 modem-controller and the receiving modem is  
successful if a correct link-connect packet is  
received at the sending modem-controller from  
the receiving modem over a cellular telephone  
system, radio frequency network or a  
25 telephone line service.

20. The method according to claim 19 further including  
the steps of:

retrying to interrogate the receiving modem a  
30 predetermined number of retry counts if the  
correct link-connect packet is not received  
from the receiving modem over a cellular  
telephone system, radio frequency network or  
a telephone line service;

00145137.003190

choosing between one of two possible modes if not  
successful in interrogating the receiving modem  
in the predetermined number of retry counts,  
said two possible modes being line disconnect  
or non-microcom networking protocol and a  
networking protocol, other than the microcom  
networking protocol operating mode over a  
cellular telephone system, radio frequency  
network or a telephone line service.

21. The method according to claim 20 wherein said  
predetermined number of retry counts is equal to six  
over a cellular telephone system, radio frequency  
network or a telephone line service.

22. The method according to claim 19 further including  
the steps of:

determining the presence of carrier from receiving  
modem over a cellular telephone system, radio  
frequency network or a telephone line service;  
automatically switching to asynchronous mode if  
presence of carrier is not determined and then  
switching to synchronous mode when presence of  
carrier is determined over a cellular telephone  
system, radio frequency network or a telephone  
line service;

readying data packet for transmission to recitation  
modem when carrier is present over a cellular  
telephone system, radio frequency network or a  
telephone line service;

transmitting data packet to receiving modem over a  
cellular telephone system, radio frequency  
network or a telephone line service;

receiving positive acknowledgement from receiving  
modem over a cellular telephone system, radio  
frequency network or a telephone line service;  
and

5 automatically repeating the five steps set forth  
above until a positive acknowledgement is not  
received from the receiving modem over a  
cellular telephone system, radio frequency  
network or a telephone line service.

10

23. The method according to Claim 22 further including  
the steps of:

checking if the retransmission timer has elapsed if  
a positive acknowledgement has not been  
15 received from the receiving modem over a  
cellular telephone system, radio frequency  
network or a telephone line service;

checking if a negative a negative acknowledgement  
has been received from the receiving modem if  
20 the retransmission timer has not elapsed over a  
cellular telephone system, radio frequency  
network or a telephone line service;

retransmitting the data packet to the receiving  
modem if a negative acknowledgement has been  
25 received from the receiving modem over a  
cellular telephone system, radio frequency  
network or a telephone line service;

automatically repeating the three steps set forth  
above until positive acknowledgement is  
30 received form the receiving modem or until the  
retransmission count reaches a predetermined  
number over a cellular telephone system, radio

09443-03193

frequency network or a telephone line service;  
and

initiating a disconnect sequence if the  
retransmission count reaches said predetermined  
5 number before a positive acknowledgement is  
received from the receiving modem over a  
cellular telephone system, radio frequency  
network or a telephone line service.

10 24. The method according to claim 23 wherein said  
retransmission count is eighteen.

25. The method according to Claim 22 further including  
the steps of:

15 checking if the retransmission timer has elapsed if  
a positive acknowledgement has not been  
received from the receiving modem over a  
cellular telephone system, radio frequency  
network or a telephone line service;  
20 retransmitting the data packet to the receiving  
modem if the retransmission timer has elapsed  
over a cellular telephone system, radio  
frequency network or a telephone line service;  
automatically repeating the two steps set forth  
25 above until positive acknowledgement is  
received from the receiving modem or until the  
retransmission count reaches a predetermined  
number over a cellular telephone system, radio  
frequency network or a telephone line service;  
30 and

initiating a disconnect sequence if the  
retransmission count reaches said predetermined  
number before a positive acknowledgement is

09145137 083198

receiving from the receiving modem over a cellular telephone system, radio frequency network or a telephone line service.

5     26. The method according to Claim 25 wherein said retransmission count is eighteen.

27. A modem-controller for transmission data signals in a synchronous mode over ordinary telephone line service,  
10     radio frequency network or a cellular telephone system without incurring errors in the transmitted data signals from a loss of carrier or a noisy transmission environment and for transmitting voice signals over telephone line service, radio frequency networks and  
15     cellular telephone systems, comprising:  
        a modem for converting received digital signals to analog signals and for converting received analog to digital signals;  
        a data access arrangement operatively connected to  
20     said modem and including a means to operatively connect to a telephone line;  
        a microcontroller operatively connected to said modem;  
        a read-only-memory operatively connected to said  
25     microcontroller;  
        protocol software in said read-only-memory in the form of firmware for controlling the operation of the modem-controller;  
        cellular telephone interface means for connected  
30     said microcontroller to a cellular telephone unit;

09445137.083498  
DATE 09/26/90

radio frequency radio interface/logic board means  
for connected said microcontroller to radio  
frequency telemetry modules or packet radios;

a voice board means for providing hands-free  
5 communication using a microphone and speaker  
over a telephone line, a wireless radio  
frequency network or a cellular telephone  
system;

analog switch means for receiving inputs from said  
10 voice board means, said radio frequency  
telemetry modules or packet radios, said  
cellular telephone and said modem-controller  
and providing outputs to said modem, data  
access arrangement , said radio frequency  
15 telemetry modules or packet radios, and said  
cellular telephone;

first analog switch for receiving input from said  
voice board means or said modem and providing  
outputs to second analog switch;

20 second analog switch for receiving input from first  
analog switch and providing outputs to said  
data access arrangement or radio frequency  
radio interface/logic board;

third analog switch for receiving input from said  
25 data access arrangement and providing outputs  
to said cellular telephone interface to said  
cellular telephone;

fourth analog switch for receiving input from said  
data access arrangement and providing outputs  
30 to said telephone line;

fifth analog switch for receiving input from  
telephone line and providing outputs to said

09445137.083198  
067E80" 4ETS4T60



cellular telephone interface to said cellular  
telephone; and  
means to connect data terminal equipment to said  
microcontroller through an interface.

5

28. The modem-controller of claim 27 wherein said  
protocol software includes means for retrying the  
connection phase for a total of six tries over a cellular  
telephone system, radio frequency network or a telephone  
line service.

10

29. The modem-controller of claim 28 wherein said  
protocol software includes means for retransmitting data  
packets, after successful connection phase, for a total  
of eighteen tries over a cellular telephone system, radio  
frequency network or a telephone line service.

15

30. The modem-controller of claim 29 wherein said  
protocol software includes means to suspend transmission  
from the modem-controller to wait for the recovery of  
loss of carrier over a cellular telephone system, radio  
frequency network or a telephone line service.

20

31. The modem-controller of claim 30 wherein said  
protocol software includes means to switch the mode of  
operation of said modem-controller from synchronous to  
asynchronous if carrier loss occurs during transmission  
in the synchronous mode of operation and to switch back  
to the synchronous mode upon recovery of the carrier over  
a cellular telephone system, radio frequency network or  
a telephone line service.

30

09445437 089409

32. The present invention relates in general to the control, transmission and reception of standard data, fax data and voice signals. More particularly, but not by way of limitation, it relates to a distinct method and apparatus for the auto-selecting and auto-routing of either standard data, fax data or voice communication over a cellular telephone system, a radio frequency network, satellite system, telephone line service or a combination of communication services. The invention may be installed internally in computers or data terminal equipment to communicate with any other computers or data terminal equipment; directly through the computers or data terminal equipment or used as a stand alone method and apparatus; connected externally to computers or data terminal equipment. More particularly, but not by way of limitation, using an enhanced and fine tuned version of (MNP) protocol called the ITC Reliable Mode (ITC-RM), it relates to a method and apparatus for transmission of standard data, fax data and voice over a cellular telephone system, radio frequency network, satellite system or a telephone line service with emphasis upon the error-free transmission and reception of standard data and fax data in an error correcting mode, said method comprising the steps of:

25        analog switching means structured to receive voice signals and

         standard or fax data signals from a plurality of different predetermined input sources and to route the received voice signals and standard

30        or fax data signals to different predetermined selectable destinations, said routing being determined by control signals received by said analog switching means;

automatic connecting between the sending  
modem-controller and the  
receiving modem over a cellular telephone system,  
radio frequency network, satellite system or a  
5 telephone line service;  
establishing desired communication configuration  
between the sending modem-controller and the  
receiving modem through handshaking over a  
cellular telephone system, radio frequency-  
10 network, satellite system or a telephone line  
service;  
determining presence of carrier from receiving modem  
over a cellular telephone system, radio  
frequency network, satellite system or a  
15 telephone line service;  
terminating the connection between the sending  
modem-controller and the receiving modem if a  
predetermined time has elapsed without  
determining presence of carrier over a cellular  
20 telephone system, radio frequency network,  
satellite system or a telephone line service;  
interrogating the receiving modem by sending  
appropriate link-connect packet from the  
sending modem-controller if presence of carrier  
25 is determined over a cellular telephone system,  
radio frequency network, satellite system or a  
telephone line service;  
determining if a correct link-connect packet is  
received at the sending modem-controller from  
30 the receiving modem over a cellular telephone  
system, radio frequency network, satellite  
system or a telephone line service; and

09145137 083199

determining that the modified network protocol  
connection between the sending modem-controller  
and the receiving modem is successful if a  
correct link-connect packet is received at the  
5 sending modem-controller from the receiving  
modem over a cellular telephone system, radio  
frequency network, satellite system or a  
telephone line service.

10 33. The method according to claim 32 further including  
the steps of:  
retrying to interrogate the receiving modem a  
predetermined number of retry counts if the  
correct link-connect packet is not received  
15 from the receiving modem over a cellular  
telephone system, radio frequency network,  
satellite system or a telephone line service;  
choosing between one of two possible modes if not  
successful in interrogating the receiving modem  
20 in the predetermined number of retry counts,  
said two possible modes being line disconnect  
or non-microcom networking protocol and a  
networking protocol, other than the microcom  
networking protocol operating mode over a  
25 cellular telephone system, radio frequency  
network, satellite system or a telephone line  
service.

30 34. The method according to claim 33 wherein said  
predetermined number of retry counts is equal to six over  
a cellular telephone system, radio frequency network,  
satellite system or a telephone line service.

09445137.083498

35. The method according to claim 32 further including the steps of:

5 determining the presence of carrier from receiving modem over a cellular telephone system, radio frequency network, satellite system or a telephone line service;

10 automatic switching to asynchronous mode if presence of carrier is not determined and then switching to synchronous mode when presence of carrier is determined over a cellular telephone system, radio frequency network, satellite system or a telephone line service;

15 readying a standard or fax data packet for transmission to recitation modem when carrier is present over a cellular telephone system, radio frequency network, satellite system or a telephone line service;

20 transmitting a standard or fax data packet to receiving modem over a cellular telephone system, radio frequency network, satellite system or a telephone line service;

25 receiving positive acknowledgement from receiving modem over a cellular telephone system, radio frequency network, satellite system or a telephone line service; and

30 automatically repeating the five steps set forth above until a positive acknowledgement is not received from the receiving modem over a cellular telephone system, radio frequency network, satellite system or a telephone line service.

5

10

15

20

25

30

network, satellite system or a telephone line service.

37. The method according to claim 36 wherein said  
5 retransmission count is eighteen.

38. The method according to Claim 35 further including  
the steps of:

10 checking if the retransmission timer has elapsed if  
a positive acknowledgement has not been  
received from the receiving modem over a  
cellular telephone system, radio frequency  
network, satellite system or a telephone line  
service;  
15 retransmitting the standard or fax data packet to  
the receiving modem if the retransmission timer  
has elapsed over a cellular telephone system,  
radio frequency network, satellite system or a  
telephone line service;  
20 automatically repeating the two steps set forth  
above until positive acknowledgement is  
received from the receiving modem or until the  
retransmission count reaches a predetermined  
number over a cellular telephone system, radio  
25 frequency network, satellite system or a  
telephone line service; and  
initiating a disconnect sequence if the  
retransmission count reaches said predetermined  
number before a positive acknowledgement is  
30 receiving from the receiving modem over a  
cellular telephone system, radio frequency  
network, satellite system or a telephone line  
service.

09145137 083198

39. The method according to Claim 38 wherein said retransmission count is eighteen.

- 5 40. A modem-controller for transmission of standard or fax data signals in a synchronous mode over ordinary telephone line service, radio frequency network, satellite system or a cellular telephone system without incurring errors in the transmitted standard or fax data
- 10 signals from a loss of carrier or a noisy transmission environment and for transmitting voice signals over telephone line service, radio frequency networks and cellular telephone systems, comprising:
- 15 a modem for converting received digital signals to analog signals and for converting received analog to digital signals;
  - a data access arrangement operatively connected to said modem and including a means to operatively connect to a telephone line;
  - 20 a microcontroller operatively connected to said modem;
  - a read-only-memory operatively connected to said microcontroller;
  - 25 protocol software in said read-only-memory in the form of firmware for controlling the operation of the modem-controller;
  - cellular telephone interface means for connecting said microcontroller to a cellular telephone unit;
  - 30 radio frequency radio interface means for connecting said microcontroller to a radio frequency telemetry module or packet radio unit;

09145137.083198



a voice board means for providing hands-free  
communication using a microphone and speaker  
over a telephone line, a wireless radio  
frequency network, satellite system or a  
cellular telephone system;

analog switch means controlled by said  
microprocessor to control input and output of  
said voice board means or said data pump means  
to said radio frequency radio means and to said  
data access arrangement means to said cellular  
telephone means, said satellite system means  
and a remote device or infrared transceiver;

first analog switch for receiving input from said  
microprocessor means to control signal path  
from said voice board means or said data pump  
means to said radio frequency or data access  
arrangement select analog switch means;

second analog switch for receiving input from said  
microprocessor means to control signal path  
from said voice/modem select switch means to  
said radio frequency radio interface/logic  
board means radio or said data access  
arrangement;

third analog switch for receiving input from said  
data microprocessor means to control signal  
path from said data access arrangement to said  
cellular telephone interface to said cellular  
telephone;

fourth analog switch for receiving input from said  
microprocessor means to control signal path  
from said data access arrangement to a remote  
device or infrared transceiver through said  
telephone line or to said satellite system;

09145137 083198  
06 FEB 80 145137

fifth analog switch for receiving input from said  
microprocessor means to control signal path  
from said remote device or infrared transceiver  
via said telephone line connected to said  
cellular telephone interface to said cellular  
telephone; and  
means to connect said data terminal equipment to  
said microcontroller through said interface.

41. The modem-controller of claim 40 wherein said  
protocol software includes means for retrying the  
connection phase for a total of six tries over a cellular  
telephone system, radio frequency network, satellite  
system or a telephone line service.

42. The modem-controller of claim 41 wherein said  
protocol software includes means for retransmitting data  
packets, after successful connection phase, for a total  
of eighteen tries over a cellular telephone system, radio  
frequency network, satellite system or a telephone line  
service.

43. The modem-controller of claim 42 wherein said  
protocol software includes means to suspend transmission  
from the modem-controller to wait for the recovery of  
loss of carrier over a cellular telephone system, radio  
frequency network, satellite system or a telephone line  
service.

44. The modem-controller of claim 43 wherein said  
protocol software includes means to switch the mode of  
operation of said modem-controller from synchronous to  
asynchronous if carrier loss occurs during transmission

09145137.083198

in the synchronous mode of operation and to switch back to the synchronous mode upon recovery of the carrier over a cellular telephone system, radio frequency network, satellite system or a telephone line service.

09145137 083158  
061430 24154760

Method and Apparatus for Transmission Data and Voice  
Abstract of the Disclosure

5 A modem-controller for auto switching and  
controlling the transmission and receiving of voice and  
error-free transmission of standard data signals, fax  
data signals and voice communications over telephone  
line service, radio frequency networks, satellite  
systems, as well as cellular telephone systems is  
10 provided and is operatively connected to computers or  
other types of data terminal equipment, a method to  
select a data access arrangement (DAA) which either  
connects to a telephone line, satellite system or a  
cellular telephone, and another method to bypass the DAA  
15 and select and control radio frequency telemetry modules  
or packet radios. The apparatus includes analog switches  
that receive control signals from the micro-controller  
for controlling and switching the audio or data path of  
the internal voice board and the analog signals from the  
20 data pump to and from a radio frequency transceiver via  
the radio frequency transceiver interface/logic board, a  
cellular telephone transceiver via the cellular  
telephone transceiver interface, a telephone landline  
via a DAA, a satellite system via a telephone landline  
25 through the DAA. Therefore, voice signals from the voice  
board, standard data or fax data from a computer or  
other type of data terminal equipment device can be sent  
over telephone landlines, wireless radio frequency  
networks, satellite system networks and cellular  
30 telephone system networks. The operation of the  
modem-controller is divided into three modes comprising  
a command mode, a data mode and an escape mode. The  
software is a set of data communication protocols which

RECEIVED

provide error-free communication of data and define a file transfer protocol at the application layer, the session protocol and the link protocol.

0014517 083493  
0014517 083493

Fig. 1A  
Fig. 1B  
Fig. 1

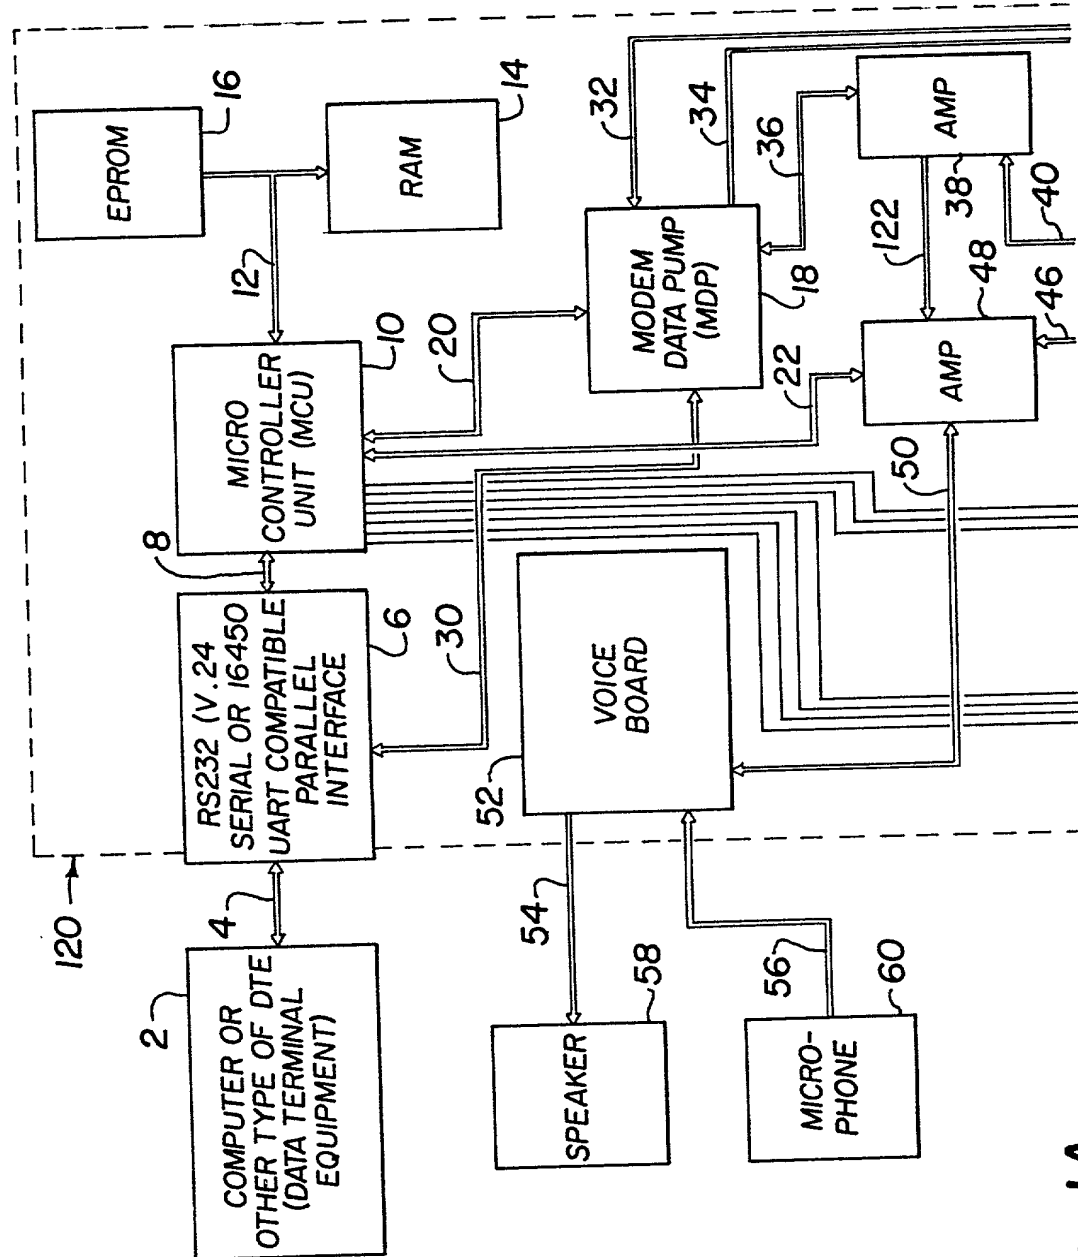


Fig. 1A

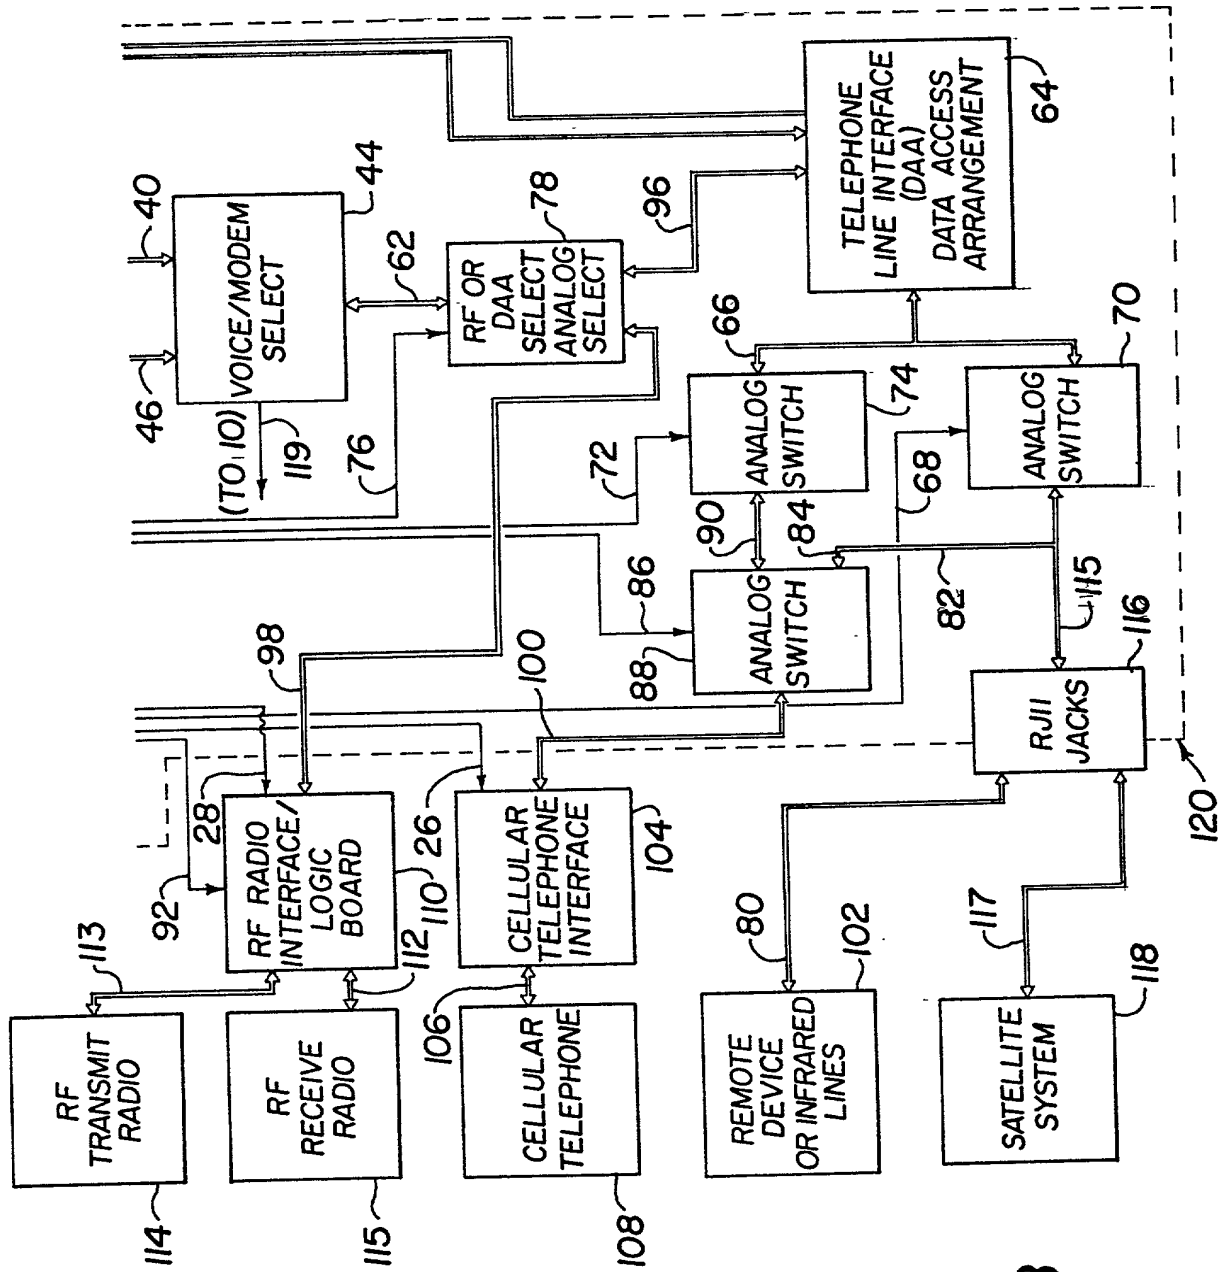


Fig. 1B

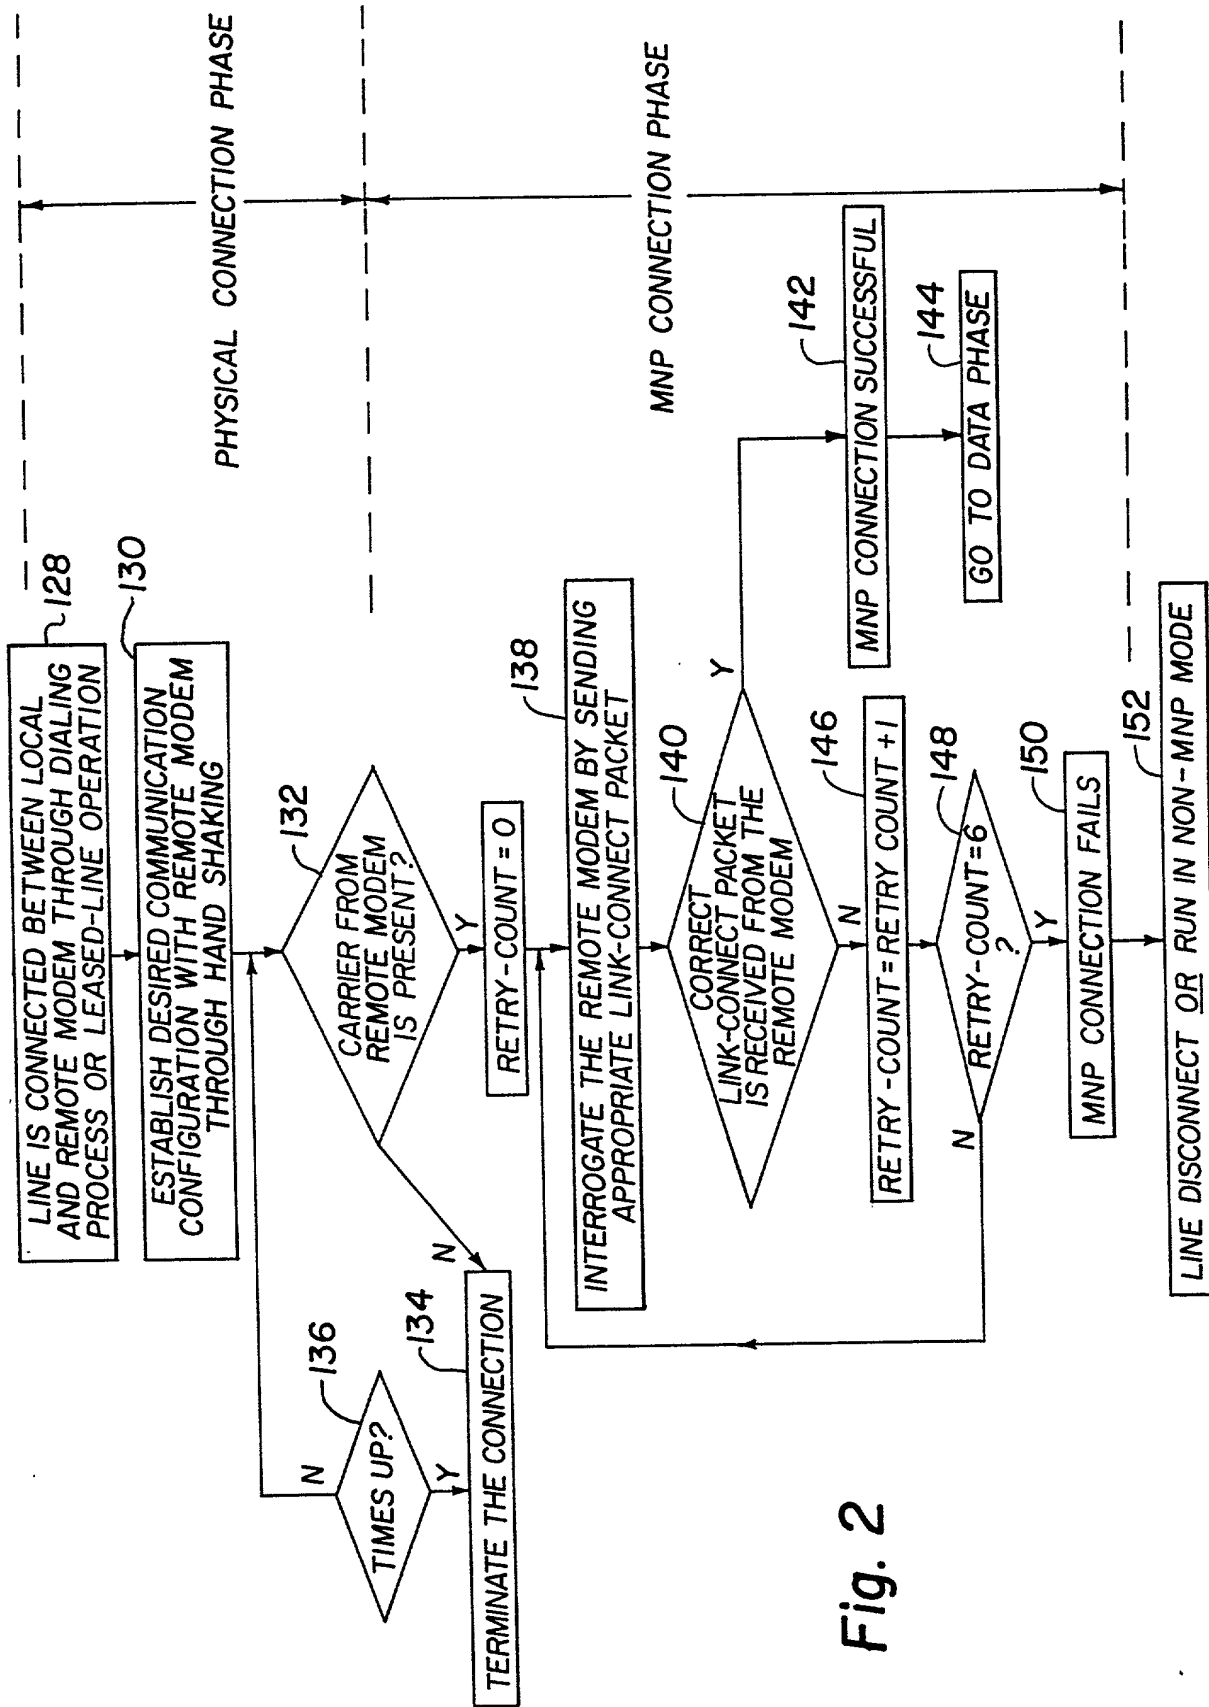


Fig. 2



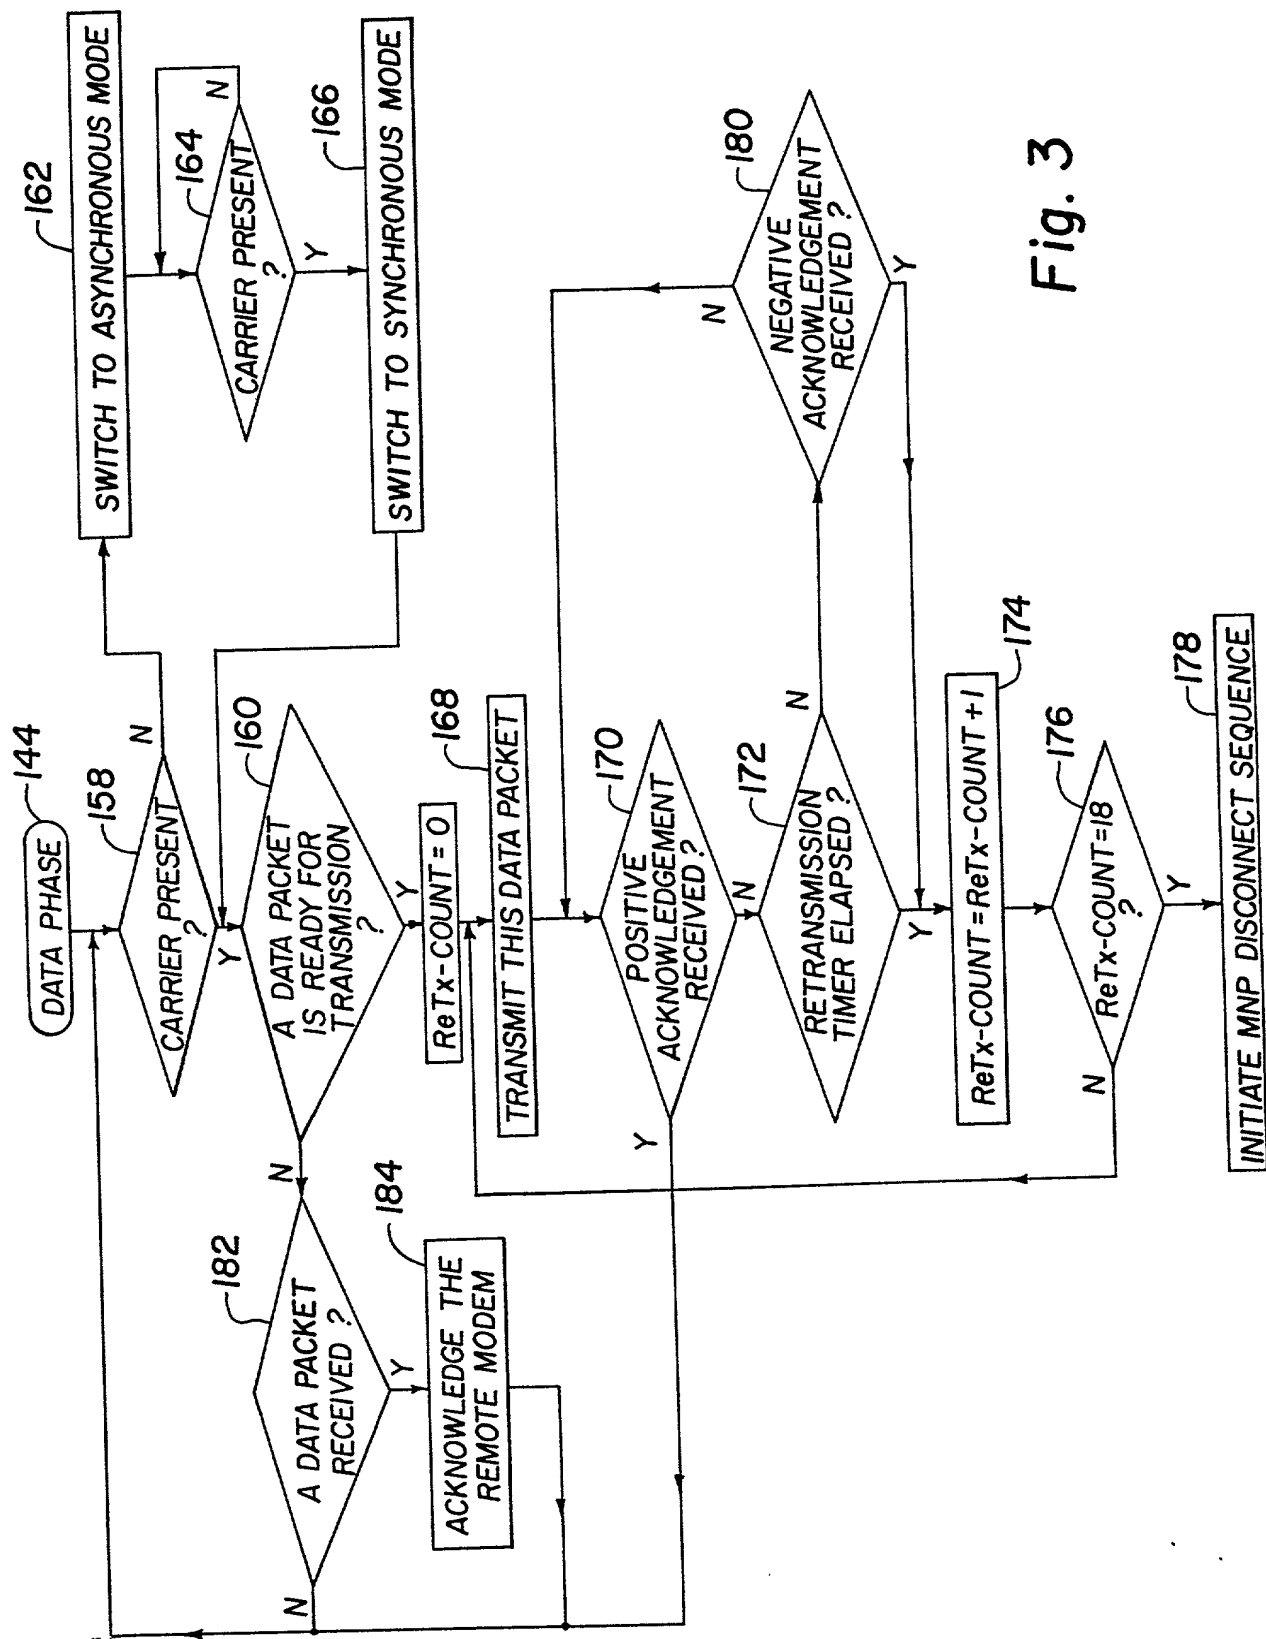


Fig. 3



**SUPPLEMENTAL**  
**DECLARATION FOR PATENT APPLICATION**

As below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled METHOD AND APPARATUS FOR TRANSMISSION OF DATA AND VOICE, the specification of which

\_\_\_\_\_ is attached hereto.

✓ was filed on September 28, 1994 as Application Serial No. 08/314,533 and was amended on 09/28/94; 03/13/95 and 05/09/95 and was a file wrapper continuation of Application No. 07/828,527 filed January 28, 1992 and amended on 03/16/94.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor Walker C. Morris

Inventor's signature Walker C. Morris Date: 6/17/95

Residence Dallas County, Texas

Citizenship United States of America

Post Office Address 11110 Russwood Circle, Dallas, Texas 75229

00445137 083493



# DECLARATION FOR PATENT APPLICATION

As the sole inventor, I declare that:

My residence, post office address, and citizenship are as stated below.

I believe that I am the original and first inventor of the subject matter which is claimed and for which a patent is sought. The invention is entitled:

METHOD AND APPARATUS FOR TRANSMISSION OF DATA AND VOICE and the specification is attached.

I have reviewed and understand the contents of the specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 C.F.R. § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

International Application No. PCT/US90/06320

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>07/733,826</u>	<u>July 22, 1991</u>	<u>pending</u>
<u>07/429,356</u>	<u>October 31, 1989</u>	<u>abandoned</u>
Application Serial No.	Filing Date	Status

All statements made of my own knowledge are true. All

09145137-083198

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Patent Application

Inventor: Walker C. Morris

For: METHOD AND APPARATUS FOR TRANSMISSION OF DATA AND VOICE

Attorney Docket No.: P-8078CIP2

DECLARATION CLAIMING SMALL ENTITY STATUS

(Independent Inventor)

As an inventor, I declare that I qualify as an independent inventor as defined in 37 C.F.R. 1.9(c) for purposes of paying reduced fees under 35 U.S.C. 41(a) and (b) to the United States Patent and Trademark Office with regard to the invention entitled METHOD AND APPARATUS FOR TRANSMISSION OF DATA AND VOICE described in the specification filed herewith.

I have not assigned, granted, conveyed, or licensed, and am under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 C.F.R. 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 C.F.R. 1.9(d) or a nonprofit organization under 37 C.F.R. 1.9(e).

All statements made of my own knowledge are true. All statements made on information and belief are believed to be true. I know that willful false statements and the like are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001. I also know that willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this declaration is directed.

Walker C. Morris

NAME OF INVENTOR

Walker C. Morris

SIGNATURE OF INVENTOR

January 7, 1992

DATE

09145137.083498

statements made on information and belief are believed to be true. I know that willful false statements and the like are punishable by fine or imprisonment, or both, under 18 U.S.C. § 1001. I also know that such willful statements may jeopardize the validity of the application or any patent issued on the application.

I hereby appoint the following attorneys, with full power of substitution and revocation, to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected with this application:

W. Thomas Timmons                      27,839                      H. Dennis Kelly                      31,032

Please send all correspondence to:

W THOMAS TIMMONS  
TIMMONS & KELLY  
PLAZA OF THE AMERICAS      STE 1720 N  
DALLAS TX 75201  
TEL 214/220-0310  
FAX 214/220-0090

Inventor's signature: \_\_\_\_\_

*Walker C. Morris*

Date of signature: \_\_\_\_\_

*January 7, 1992*

Name of inventor: Walker C. Morris

P.O. Address: 11110 Russwood Circle  
Dallas, Texas 75229

Residence: Dallas County Texas

Citizenship: U.S.A.

09145137.083498